


CAMHAVEN v2™

FP8094** Ceiling Fan

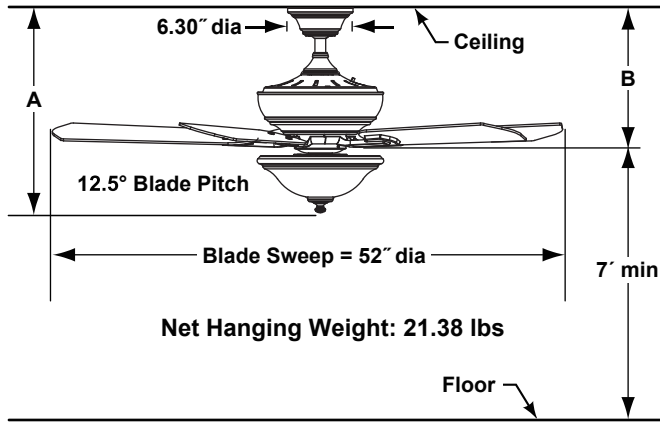

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 21.6" reversible Plywood blades is included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4**, WC2WH and WR501WH wall controls, BTCR9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18W dimmable LED included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

	A	B
Fan w/4.5" downrod	17.87"	12.57"
Fan w/12" downrod	25.37"	20.07"
Fan w/18" downrod	31.37"	26.07"
Fan w/24" downrod	37.37"	32.07"
Fan w/36" downrod	49.37"	44.07"
Fan w/48" downrod	61.37"	56.07"
Fan w/60" downrod	73.37"	68.07"
Fan w/72" downrod	85.37"	80.07"

Available Finishes		
Fan / Housing Assembly		Blade
BN	Brushed Nickel	Cherry/Dark Walnut with Frosted White Glass
DZ	Dark Bronze	Cherry/Dark Walnut with Frosted White Glass
GR	Matte Greige	Weathered Wood with Frosted White Glass
MW	Matt White	Matt White with Frosted White Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	178	5543	80	0.58	69
Med	127	3861	101	0.44	38
Low	62	1884	154	0.25	12

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
43	3828	12	88

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%