




BP200**1 Series Ceiling Fans

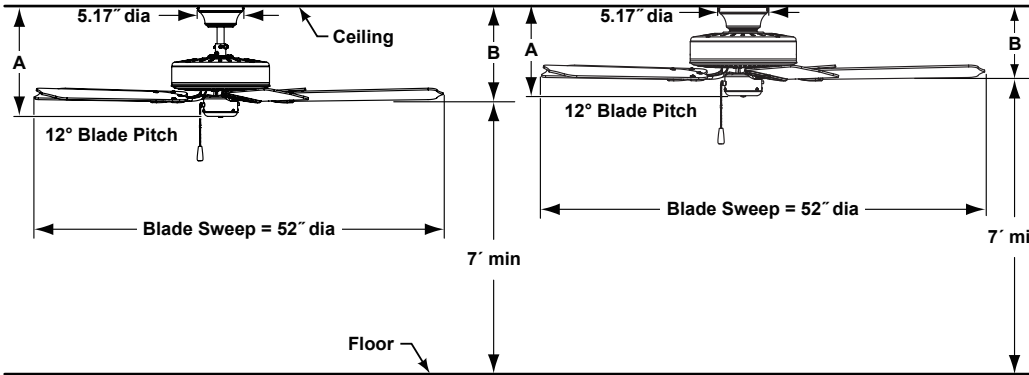

Net Hanging Weight: 15.28 lbs

	A	B
Fan In Close to Ceiling Configuration	9.63"	7.74"

	A	B
Fan w/4.5" downrod	13.20"	11.10"
Fan w/12" downrod	20.70"	18.60"
Fan w/18" downrod	26.70"	24.60"
Fan w/24" downrod	32.70"	30.60"
Fan w/36" downrod	44.70"	42.60"
Fan w/48" downrod	56.70"	54.60"
Fan w/60" downrod	68.70"	66.60"
Fan w/72" downrod	80.70"	78.60"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" traditional wood blades is included.

CONTROL OPTIONS:

Optional CW5, WC1WH, WC2WH, WR500WH and WR501WH wall controls available—sold separately. Optional BTR9, CRL4WH and CR500 remote controls and BTR9 and WFR50 receiver units are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

LOCATION USE:

Series fans are rated for dry locations only.

Available Finishes	
Fan / Housing Assembly	Blades - Traditional
BL – Black	Black / walnut reversible
MW – Matte white	Matte white
OB – Oil-rubbed bronze	Cherry / walnut reversible
SN – Satin nickel	Cherry / walnut reversible

Airflow / Energy Efficiency Info (120V)-Hugger					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	153	3818	76	0.42	50
Med	100	2240	113	0.27	20
Low	56	1180	159	0.16	7

Airflow / Energy Efficiency Info (120V)-Standard					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	154	4286	85	0.42	50
Med	100	2647	134	0.27	20
Low	55	1410	189	0.16	7

Energy Guide FTC (Hugger)			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2581	8	85

Energy Guide FTC (Standard)			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2938	8	97