




BP230**1 Damp Series Ceiling Fans

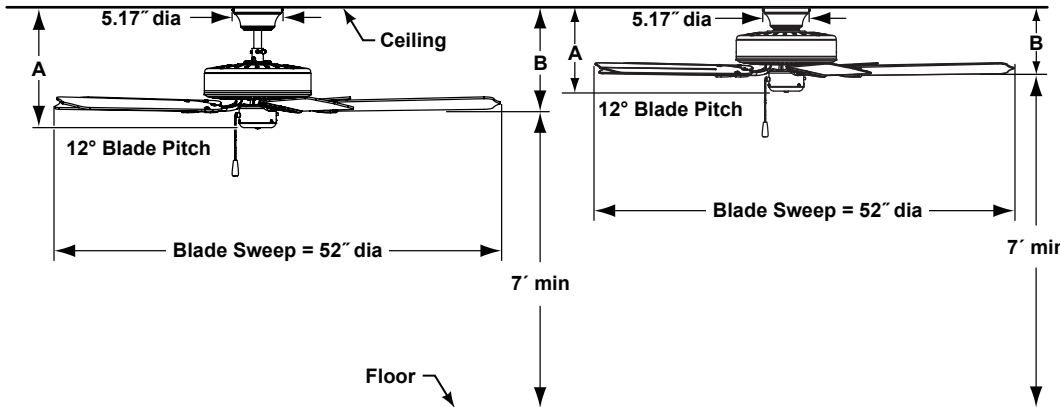

| | A | B |
|---------------------------------------|--------|--------|
| Fan In Close to Ceiling Configuration | 9.63" | 7.72" |
| | A | B |
| Fan w/4.5" downrod | 13.20" | 11.10" |
| Fan w/12" downrod | 20.70" | 18.60" |
| Fan w/18" downrod | 26.70" | 24.60" |
| Fan w/24" downrod | 32.70" | 30.60" |
| Fan w/36" downrod | 44.70" | 42.60" |
| Fan w/48" downrod | 56.70" | 54.60" |
| Fan w/60" downrod | 68.70" | 66.60" |
| Fan w/72" downrod | 80.70" | 78.60" |

Net Hanging Weight: 16.12 lbs

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" traditional all-weather composite blades is included.

CONTROL OPTIONS:

Optional CW5, WC1WH, WC2WH, WR500WH and WR501WH wall controls available—sold separately. Optional BTCR9, CRL4WH and CR500 remote controls and BTR9 and WFR50 receiver units are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for slope angles up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Call technical support for more information.

LOCATION USE:

Fans are rated for dry and damp locations.

Available Finishes

| Fan / Housing Assembly | Blades - Traditional |
|------------------------|-----------------------------|
| BL – Black | Black composite blade |
| MW – Matte white | Matte white composite blade |
| OB – Oil-rubbed bronze | Walnut composite blade |
| SN – Satin nickel | Cherry composite blade |

Airflow / Energy Efficiency Info (120V)-Hugger

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 146 | 4056 | 83 | 0.41 | 49 |
| Med | 106 | 2491 | 119 | 0.27 | 21 |
| Low | 53 | 1430 | 178 | 0.16 | 8 |

Airflow / Energy Efficiency Info (120V)-Standard

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 146 | 4404 | 91 | 0.40 | 48 |
| Med | 110 | 2776 | 133 | 0.27 | 21 |
| Low | 54 | 1534 | 190 | 0.17 | 8 |

Energy Guide FTC (Hugger)

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 30 | 2825 | 8 | 95 |

Energy Guide FTC (Standard)

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 29 | 3059 | 8 | 104 |