


# C1\*\* Ceiling Fan

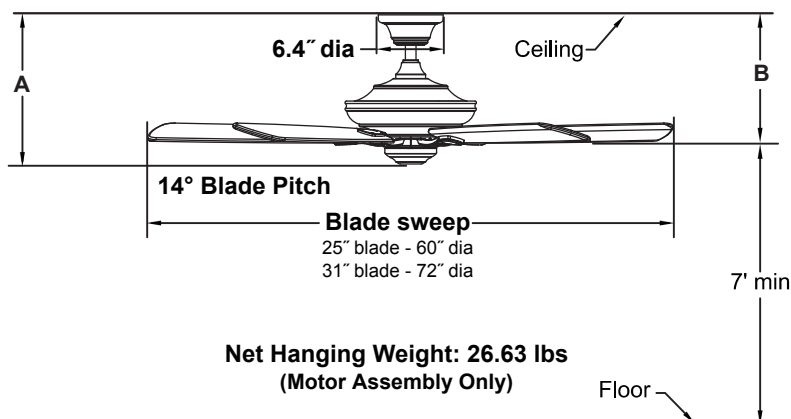

	A	B
Fan w/4.5" downrod	14.70"	13.20"
Fan w/12" downrod	22.20"	20.70"
Fan w/18" downrod	28.20"	26.70"
Fan w/24" downrod	34.20"	32.70"
Fan w/36" downrod	46.20"	44.70"
Fan w/48" downrod	58.20"	56.70"
Fan w/60" downrod	70.20"	68.70"
Fan w/72" downrod	82.20"	80.70"

Available Finish	
BN	Brushed Nickel
DZ	Dark Bronze
MW	Matte White

## INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

212 x 25 AC motor is designed for optimal performance with this fan.

## BLADES:

5 bladed blade sets are available in buttonwood, plywood and ABS materials. Optional B172, B272, B372 and B472 blades—all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for blade options.

## LIGHTING OPTIONS:

The Light kit option F1, F2, F3 and F4—all sold separately. The Glasses option G1, G2, G3, G4, G5 and G6—all sold separately. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for light kit and glasses options.

## CONTROL OPTIONS:

BTT9R bluetooth hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional C21 wall control is available—sold separately. Instructions are provided with each control.

## DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped hanger ball (APG245BL) is available for slope angles greater than 19° and up to 32°—included. Optional close-to-ceiling kit is available as well—included. Call technical support for more information.

## LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V) Airflow measured with B172 Blade in 72"					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	98	6823	94	0.60	73
Med	64	4612	130	0.42	64
Low	32	2147	179	0.24	12

Energy Guide FTC test with B172 Blade			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
45	3373	13	67