


**CANCUN™**

**FP8009OB**  
**Standard**  
**Ceiling Fan**

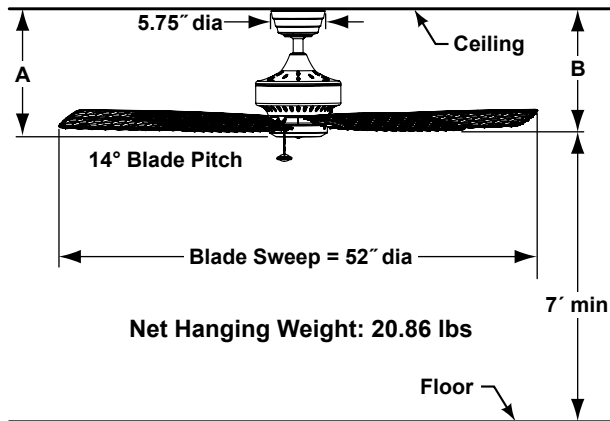

	A	B
Fan w/4.5" downrod	13.73"	11.98"
Fan w/12" downrod	21.23"	19.48"
Fan w/18" downrod	27.23"	25.48"
Fan w/24" downrod	33.23"	31.48"
Fan w/36" downrod	45.23"	43.48"
Fan w/48" downrod	57.23"	55.48"
Fan w/60" downrod	69.23"	67.48"
Fan w/72" downrod	81.23"	79.48"

Available Finish	
OB	Oil-Rubbed Bronze

**INSTALLATION REQUIREMENTS:**

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

172 x 20 motor is designed for optimal performance with this fan.

**BLADE SETS:**

A set of 5 damp location rated all-weather antique bamboo finish blades is included.

**CONTROL OPTIONS:**

Optional CW1\*\*, CW1SW\*\*, CW2\*\*, CW5\*\* and CWRL4\*\* wall controls and CRL4WH and CRL8TS remote controls (with receiver units) are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Optional lighting fitters and light kits are available. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for lighting options.

**DOWNROD OPTIONS:**

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call your local dealer for more information.

**LOCATION USE:**

Fan is rated for dry and damp location usage.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	156	5848	85	0.58	69
Med	94	3691	136	0.37	27
Low	48	2111	205	0.23	10