




CANCUN™

**FP8009OB-220
Standard
Ceiling Fan**

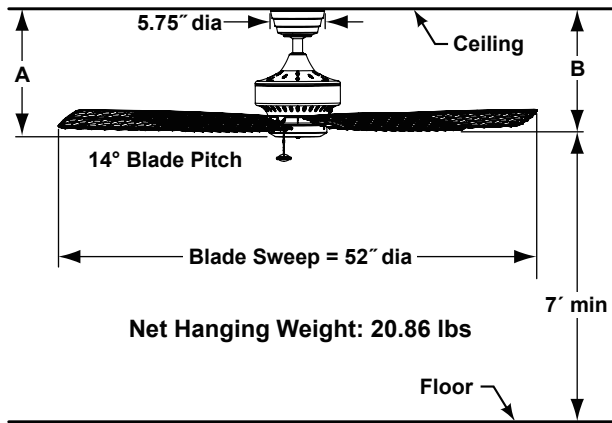

	A	B
Fan w/4.5" downrod	13.73"	11.98"
Fan w/12" downrod	21.23"	19.48"
Fan w/18" downrod	27.23"	25.48"
Fan w/24" downrod	33.23"	31.48"
Fan w/36" downrod	45.23"	43.48"
Fan w/48" downrod	57.23"	55.48"
Fan w/60" downrod	69.23"	67.48"
Fan w/72" downrod	81.23"	79.48"

Available Finish	
OB	Oil-Rubbed Bronze

TUV/GS Efficiency Info (220V)			
Fan Speed	Max RPM	Amps	Watts
High	136	0.24	58
Med	98	0.18	34
Low	48	0.11	10

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

MOTOR SPECS:

172 x 20-220 motor is designed for optimal performance with this fan.

BLADE SETS:

A set of 5 22" damp location rated all-weather antique bamboo finish blades is included.

CONTROL OPTIONS:

C1-220, C2-220, C3-220 and C6-220 wall controls and TR4WH-220 and CRL8TS-220 remote controls are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well-sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry and damp location usage.