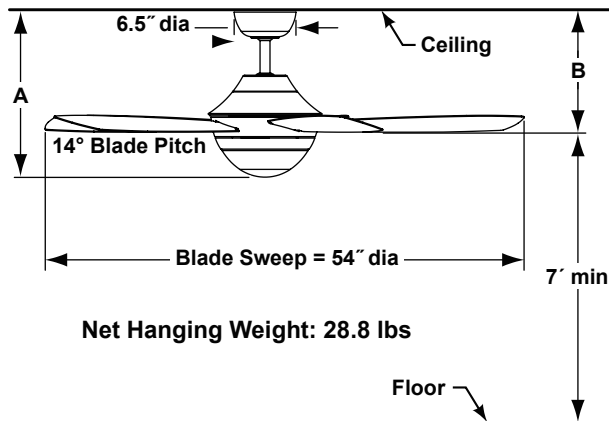
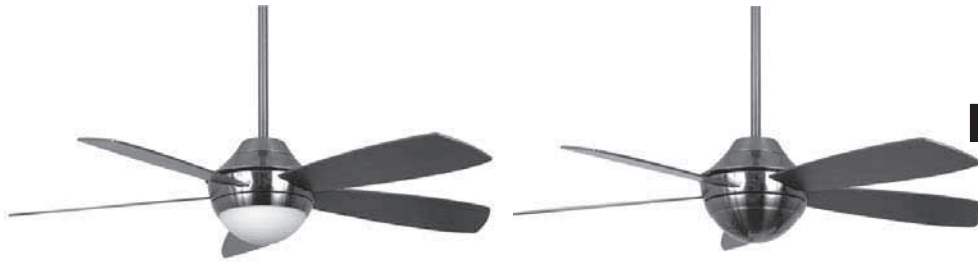


**CELANO™****FP5420PW-220  
Ceiling Fan****INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 220~240 volts AC, 50 Hz, 5 amp circuit.

**MOTOR SPECS:**

188 x 20-220 motor is designed for optimal performance with this fan.

**BLADES:**

A set of five 21.3" wood blades is included—walnut with OB and PW finishes and cherry with PN finish. Optional set of five cherry wood blades (B5400CY) is available for OB and PW fans—sold separately.

**CONTROL OPTIONS:**

C4FL-220 hand-held remote control is included. Push button remote control has 3 fan speeds and on/off light button. Optional C1-220, C2-220, C3-220 and C6-220 wall controls, TR4WH-220 remote control are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

Two bulb (Two 15 watt CFL bulbs -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 30 watts.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Optional Decorative DR Sleeve (DRS54\*\*) is available, requires an 18" or longer downrod. Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

**LOCATION USE:**

Fan is rated for dry locations only.



	A	B
Fan w/6" downrod	18.00"	11.60"
Fan w/12" downrod	24.00"	17.60"
Fan w/18" downrod	30.00"	23.60"
Fan w/24" downrod	36.00"	29.60"
Fan w/36" downrod	48.00"	41.60"
Fan w/48" downrod	60.00"	53.60"
Fan w/60" downrod	72.00"	65.60"
Fan w/72" downrod	84.00"	77.60"

Available Finish	
OB	Oil-Rubbed Bronze fan with opal frosted glass
PN	Polished Nickel fan with opal frosted glass
PW	Pewter fan with opal frosted glass

TUV/GS Efficiency Info (220V)			
Fan Speed	Max RPM	Amps	Watts
High	151	0.28	73
Med	114	0.24	42
Low	70	0.18	19