


**ZONIX™**

# FP4650\*\*

## 54" Ceiling Fan

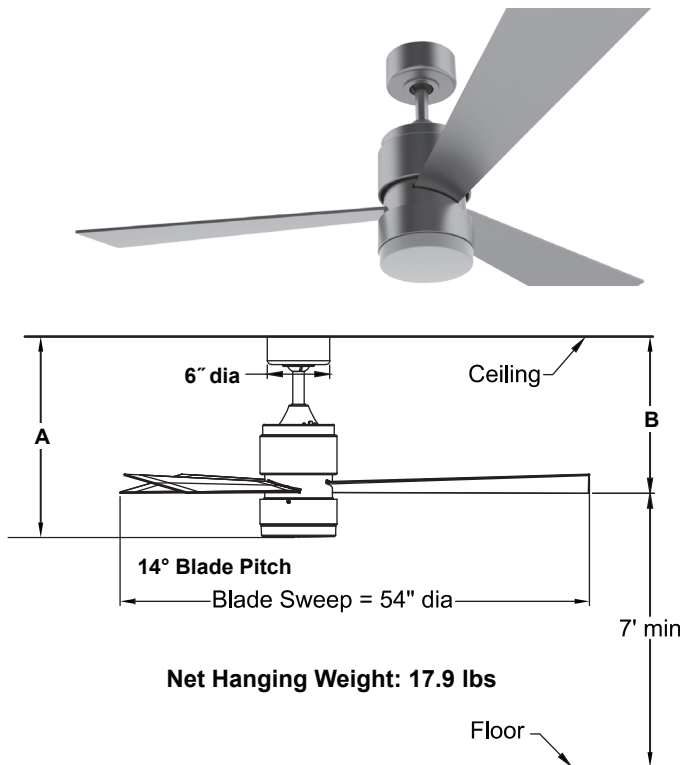

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 18 AC motor is designed for optimal performance with this fan.

### BLADE SETS:

A set of three 26" plastic blades is included.

### CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CW1SW, C25 and CW60WH-4650 wall controls, BTCR9 and CRL4WH remote controls with receiver unit, BTT9 hand held remote and BTR9 receiver unit are available —sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

One 16-watt LED included.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry or damp locations.

	A	B
Fan w/6" downrod	18.50"	14.43"
Fan w/12" downrod	24.50"	20.43"
Fan w/18" downrod	30.50"	26.43"
Fan w/24" downrod	36.50"	32.43"
Fan w/36" downrod	48.50"	44.43"
Fan w/48" downrod	60.50"	56.43"
Fan w/60" downrod	72.50"	68.43"
Fan w/72" downrod	84.50"	80.43"

Available Finishes	
BN	Brushed Nickel with Brushed Nickel Blades and Opal Frosted Glass
DCP	Dark Copper Penny with Dark Walnut Blades and Opal Frosted Glass
OB	Oil-rubbed Bronze with Walnut Blades and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	130	4436	79	0.44	57
Med	92	3012	104	0.31	29
Low	66	2123	125	0.22	17

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
36	3707	10	103

Light Bulb Information (120V)				
Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	16	720	2700	92%