
# PALMA™

# FP6258BNMW Ceiling Fan



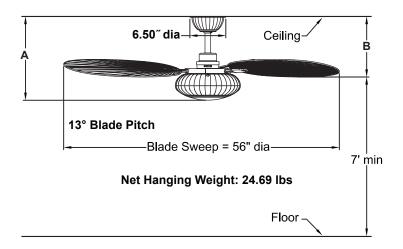

	Α	В	
Fan w/ 6" downrod	15.13"	11.05″	
Fan w/12" downrod	21.13"	17.05"	
Fan w/18" downrod	27.13"	23.05"	
Fan w/24" downrod Fan w/36" downrod Fan w/48" downrod	33.13"	29.05"	
	45.13"	41.05"	
	57.13"	53.05"	
Fan w/60" downrod	69.13"	65.05"	
Fan w/72" downrod	81.13"	77.05"	

### **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

188 x 22 AC motor is designed for optimal performance with this fan.

#### **BLADES:**

A set of three 22" composite blades is included.

#### **LIGHTING OPTIONS:**

One 18-watt LED included.

Available Finish			
BNMW	Brushed Nickel with Matte White Housing and Blade		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	162	6508	86	0.63	76
Med	97	3790	129	0.39	29
Low	49	1995	186	0.23	11

Energy Guide FTC				
Power (Wave) Total Air Delivery (CFMave)		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)	
45	3346	13	75	

	Light Bulb Information (120V)					
Bulb Type Watts		Watts	Lumens Amount	Color Temp	CRI	
LED		18	1440	3000	80%	

#### **CONTROL OPTIONS:**

CW60WH-6258 wall control is included. Switch control has 3 fan speeds, infinite light levels and off button. The reverse switch is on the motor housing. Optional CW1SW and CW2 wall controls available—sold separately. Optional BTCR9 and CRL4WH remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

#### **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

## **LOCATION USE:**

Fan is rated for dry and damp locations.