


**XENO™ WET**

## FP6729\*\* Ceiling Fan

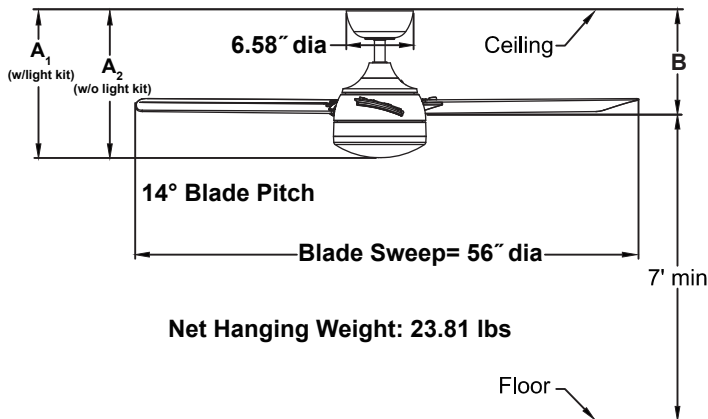

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

188 x 25 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of three 24.5" composite blades is included.

### LIGHTING OPTIONS:

One 18-watt LED included.

### CONTROL OPTIONS:

CW60WH-6729 wall control is included. Switch control has 3 fan speeds, infinite light levels and off button. The reverse switch is on the motor housing. Optional CW1SW, CW2 and CWRL4 wall controls available—sold separately. Optional C4, CRL4WH, CRL8TS and BTR9 remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long wet-location downrod (DR1SS-45). Optional wet-location downrods are available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry, damp and wet locations.

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	14.54"	14.54"	10.24"
Fan w/12" downrod	22.04"	22.04"	17.74"
Fan w/18" downrod	28.04"	28.04"	23.74"
Fan w/24" downrod	34.04"	34.04"	29.74"
Fan w/36" downrod	46.04"	46.04"	41.74"
Fan w/48" downrod	58.04"	58.04"	53.74"
Fan w/60" downrod	70.04"	70.04"	65.74"
Fan w/72" downrod	82.04"	82.04"	77.74"

### Available Finish

BNW	Brushed Nickel with Brushed Nickel Blade
DZW	Dark Bronze with Dark Bronze Blade
MWW	Matte White with Matte White Blade

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	186	7782	135	0.48	58
Med	122	5217	192	0.33	27
Low	79	3548	265	0.23	13

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
36	4669	10	130

### Light Bulb Information (120V)

Bulb Type	Watts	Lumens Amount	Color Temp	CRI
LED	18	1440	3000	80%