



CARUSO™

FP7000OB Ceiling Fan

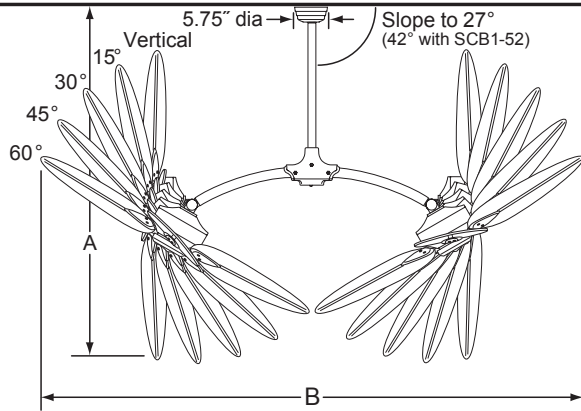

24" downrod included—longer lengths available
True stainless steel rust resistant downrods available

Net Hanging Weight: 60 lbs.

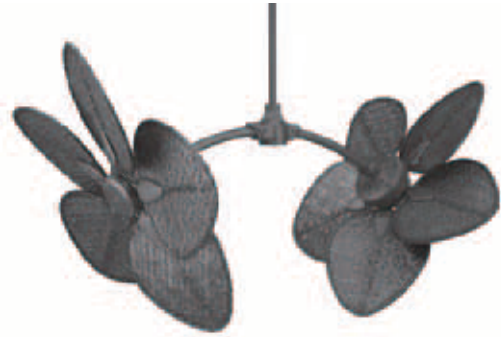

Motor Tilt Angle	44" Sweep Blades		49" Sweep Blades		52" Sweep Blades	
	Dim. A w/24" DR	Dim. B w/24" DR	Dim. A w/24" DR	Dim. B w/24" DR	Dim. A w/24" DR	Dim. B w/24" DR
Vertical	54.5"	56.5"	56.5"	56.5"	58.5"	56.5"
15°	55.0"	63.5"	58.0"	64.5"	59.0"	65.5"
30°	54.5"	73.0"	56.0"	75.0"	58.0"	77.0"
45°	52.5"	80.5"	54.0"	83.0"	55.0"	86.0"
60°	49.0"	85.0"	50.0"	88.5"	*51.0"	*92.0"

Available Finishes

OB Oil-rubbed bronze

INSTALLATION REQUIREMENTS:

Fan must be secured to a structural member, such as a ceiling joist, capable of withstanding a load of at least 100 lbs. A 3/8" x 5" long lag bolt passes through loop in ceiling support cable, hanger bracket plate, and into wood structural member above.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

Powerful twin 188 x 25 AC motors are designed for optimal performance with this fan.

FAN SPEEDS:

2-speed reversible (located on switch cup).

DESIGN FEATURES:

Adjustable motor heads with five angles of blade tilt; Vertical, 15°, 30°, 45°, and 60° from vertical.

BLADES:

A variety of palm, bamboo, and all-weather composite blades are available—sold separately. See our catalog or visit our www.fanimation.com for blade options.

CONTROL OPTIONS:

CW3WH-CA 2-speed wall control is included. Optional CW6WH wall control and TR24WH hand-held remote control are available with the use of optional SW70 switch cap receiver—all sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 24" (DR1-24) A downrod coupler is available for installations requiring a downrod longer than 72". Shorter downrods may be used with various motor angles and blade length combinations. The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location usage. Damp location rated with use of oil-rubbed bronze finish and woven bamboo or all-weather composite blades.

Airflow / Energy Efficiency Info (120V) Airflow measured with BPP4 blades

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	145	10393	139	0.63	75
Low	105	7583	172	0.48	44