




TORTO™
FP7900**
Ceiling Fan

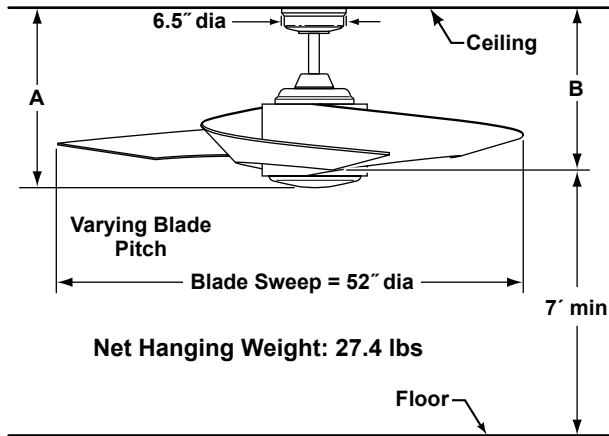

	A	B
Fan w/6" downrod	16.50"	15.00"
Fan w/12" downrod	22.50"	21.00"
Fan w/18" downrod	28.50"	27.00"
Fan w/24" downrod	34.50"	33.00"
Fan w/36" downrod	46.50"	45.00"
Fan w/48" downrod	58.50"	57.00"
Fan w/60" downrod	70.50"	69.00"
Fan w/72" downrod	82.50"	81.00"

Available Finishes	
BL	Black with Opal Frosted Glass
MG	Metro Gray with Opal Frosted Glass
MW	Matte White with Opal Frosted Glass
OB	Oil-rubbed Bronze with Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	96	4425	80	0.47	56
Med	67	2849	108	0.39	26
Low	47	2057	141	0.31	15

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	1142	11	30

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
Candelabra	60	2	1020	2700	99

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 AC motor is designed for optimal performance with this fan.

BLADE SET:

A set of three composite blades is included.

CONTROL OPTIONS:

TR20WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels, reverse and off button. Optional C21 wall control, BTCR9U remote control with receiver unit, BTT9R hand held remote and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

2-bulb built-in downlight fixture with two 60-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.