


BECKWITH™

FP7964** 23" Ceiling Fan

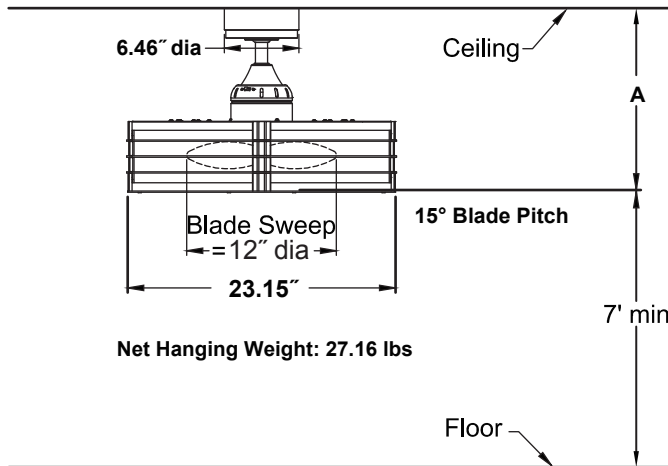

	A
Fan w/4.5" downrod	15.96"
Fan w/12" downrod	23.46"
Fan w/18" downrod	29.46"
Fan w/24" downrod	35.46"
Fan w/36" downrod	47.46"
Fan w/48" downrod	59.46"
Fan w/60" downrod	71.46"
Fan w/72" downrod	83.46"

Available Finishes

BN	Brushed Nickel with Brushed Nickel Blade and Frosted White Shade
OB	Oil-rubbed Bronze with Black Blade and Frosted White Shade

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

82 x 25 AC motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CW1SW, CW2, C25, CWRL4 and CW60WH wall controls, and BTCR9, C4, CRL4WH and CRL8TS hand-held remote controls with receiver unit available, BTT9 hand held remote and BTR9 receiver are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Four 43-watt E12 halogen candelabra base bulbs included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1615	907	17	0.46	55
Med	1220	678	27	0.35	25
Low	860	465	29	0.29	16

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
39	943	11	24

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
Halogen candelabra	43	4	1368	2500	99%