


CANCUN™

FP8012**

52" Wet Location Fan

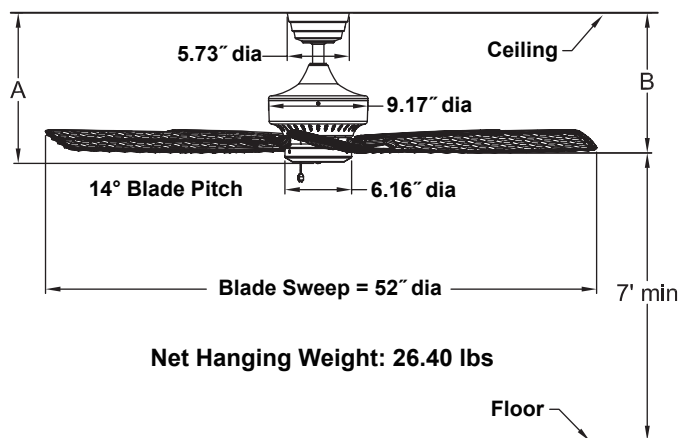

	A	B
Fan w/4.5" downrod	13.91"	12.95"
Fan w/12" downrod	21.41"	20.45"
Fan w/18" downrod	27.41"	26.45"
Fan w/24" downrod	33.41"	32.45"
Fan w/36" downrod	45.41"	44.45"
Fan w/48" downrod	57.41"	56.45"
Fan w/60" downrod	69.41"	68.45"
Fan w/72" downrod	81.41"	80.45"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 25 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 22" wet location rated all-weather antique woven bamboo finish blades is included.

CONTROL OPTIONS:

Optional CW5, WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls are available—sold separately. Optional BTCR9, CRL4WH and CR500 remote controls with receiver unit and BTR9 receiver unit and WFR 50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional wet-location downrods (DR1SS-45) available in 12", 18", 24", 36", 48", 60", and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

Available Finishes

Fan / Housing Assembly		Blades
OB	Oil-rubbed Bronze	Antique Bamboo Woven
WH	White	White Bamboo Woven

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	131	5095	70	0.61	73
Med	95	3418	98	0.42	35
Low	43	1485	146	0.23	10

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
43	3403	12	78