


**VENTANA™**

## FP8032DZ Ceiling Fan

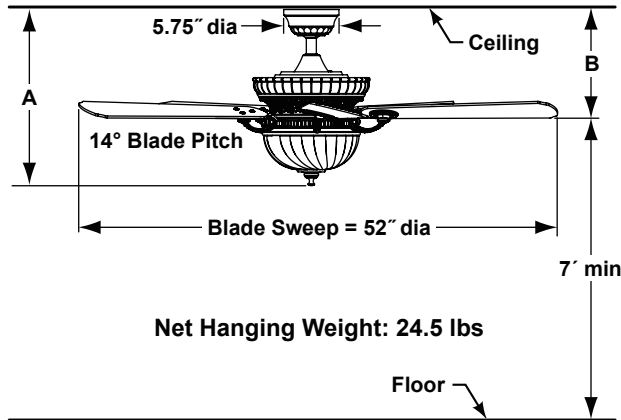

### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

### BLADE SETS:

A set of five 20.7" reversible wood blades is included.

### CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CW1SW, CW2, C25, CWRL4 and CW60WH wall controls, BTRC9, C4, CRL4WH and CRL8TS hand held remote controls with receiver unit available, BTT9 hand held remote and BTR9 receiver are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Two-bulb (50-watt halogen minican bulbs -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

### DOWNROD OPTIONS:

The Ventana™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Ventana™ fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately.

### LOCATION USE:

Fan is rated for dry locations only.

	A	B
Fan w/4.5" downrod	18.38"	10.59"
Fan w/12" downrod	25.88"	18.09"
Fan w/18" downrod	31.88"	24.09"
Fan w/24" downrod	37.88"	30.09"
Fan w/36" downrod	49.88"	42.09"
Fan w/48" downrod	61.88"	54.09"
Fan w/60" downrod	73.88"	66.09"
Fan w/72" downrod	85.88"	78.09"

### Available Finish

DZ	Dark Bronze with Cherry/Dark Walnut Blade and Frosted White glass
----	---

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
Hig	168	5792	83	0.58	70
Med	119	3965	107	0.49	37
Low	59	1946	162	0.31	12

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
45	3638	13	81

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
Halogen Minican	50	2	1092	2653	99%