




CANCUN™

FP8042** 42" Ceiling Fan

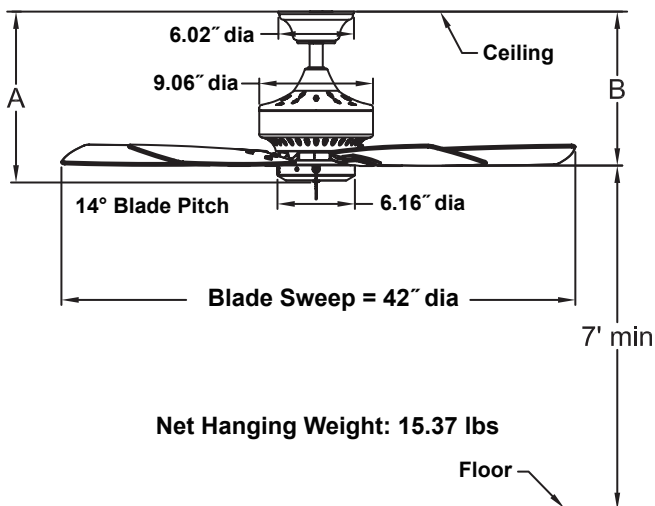

	A	B
Fan w/4.5" downrod	13.60"	12.26"
Fan w/12" downrod	21.10"	19.76"
Fan w/18" downrod	27.10"	25.76"
Fan w/24" downrod	33.10"	31.76"
Fan w/36" downrod	45.10"	43.76"
Fan w/48" downrod	57.10"	55.76"
Fan w/60" downrod	69.10"	67.76"
Fan w/72" downrod	81.10"	79.76"

Available Finishes

Fan / Housing Assembly		Blades-Traditional
OB	Oil-rubbed Bronze	Cherry/Walnut
WH	White	White

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153x 13 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 17" reversible traditional wood blades is included.

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5, CWRL4 and CW60WH wall controls are available—sold separately.

Optional BTCR9, C4, CRL4WH and CRL8TS remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for lighting options.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	196	3943	84	0.38	47
Med	145	2898	116	0.29	25
Low	96	1951	165	0.20	12

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2598	8	88