




**SUBTLE 56™**

## FPD6228\*\* 56\"/>

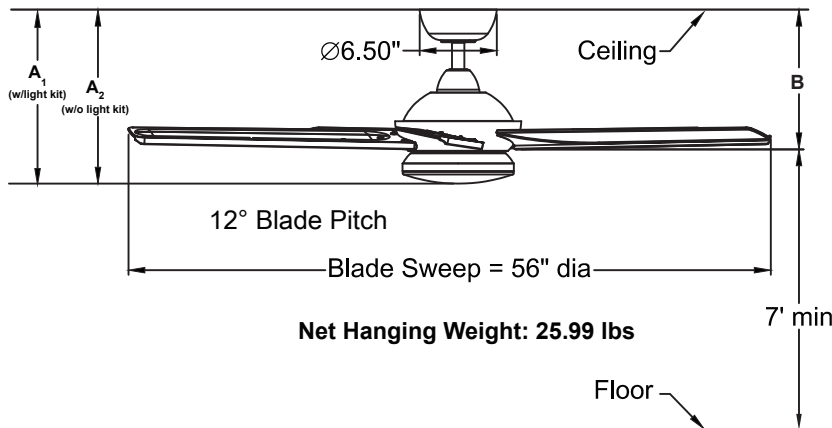

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 25" blades in plastic with aluminum trim materials.

### CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR6228 WiFi receiver unit are available—sold separately. Instructions are provide with each control.

### LIGHTING OPTIONS:

One 18-watt dimmable LED.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling upto 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well-sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations.

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	14.61"	14.61"	11.67"
Fan w/12" downrod	22.11"	22.11"	19.17"
Fan w/18" downrod	28.11"	28.11"	25.17"
Fan w/24" downrod	34.11"	34.11"	31.17"
Fan w/36" downrod	46.11"	46.11"	43.17"
Fan w/48" downrod	58.11"	58.11"	55.17"
Fan w/60" downrod	70.11"	70.11"	67.17"
Fan w/72" downrod	82.11"	82.11"	79.17"

### Available Finishes

BN	Brushed Nickel with Bourbon Blade and Opal Frosted Glass / Steel Cap
DZ	Dark Bronze with Bourbon Blade and Opal Frosted Glass / Steel Cap
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass / Steel Cap

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%

### Airflow / Energy Efficiency Info

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 <sup>th</sup> )	141	5272	163	0.43	32
Med (9 <sup>th</sup> )	87	3276	425	0.12	8
Low (1 <sup>th</sup> )	28	471	262	0.04	2

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	4083	6	190