


DRONE™

FPD6235** Ceiling Fan

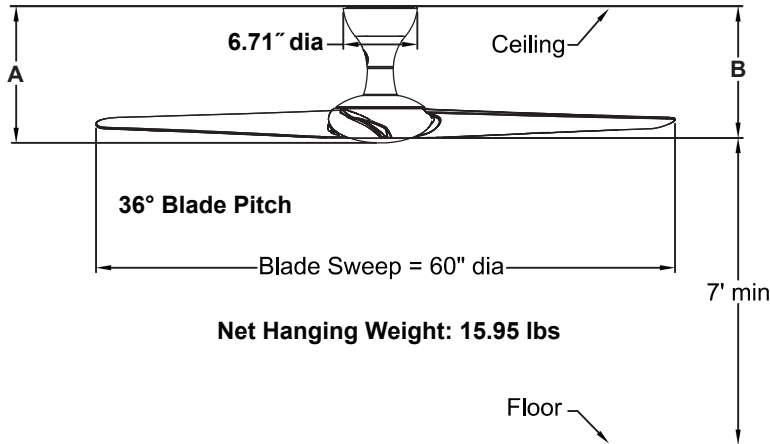

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

158 x 22 sensorless DC motor is designed for optimal performance with this fan.

BLADES:

A set of three 30" composite blades is included.

CONTROL OPTIONS:

TR205D hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, infinite light levels, fan/light timer, home away, safe exit and off button. Optional TW206D wall control and WFR6235 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

EXTENSION ROD OPTIONS:

Optional extension rods are available in 6", 12", 24", 36" and 48" lengths — all sold separately. See our catalog or visit www.fanimation.com for extension rod options.

LOCATION USE:

Fan is rated for dry and damp locations.

	A	B
FPD6235 Ceiling Fan	12.37"	11.91"
Fan w/ET6235-6" Extension Rod	18.37"	17.91"
Fan w/ET6235-12" Extension Rod	24.37"	23.91"
Fan w/ET6235-24" Extension Rod	36.37"	35.91"
Fan w/ET6235-36" Extension Rod	48.37"	47.91"
Fan w/ET6235-48" Extension Rod	60.37"	59.91"

Available Finish	
GBL	Glossy Black with Glossy Black Blade
GWH	Glossy White with Glossy White Blade
SL	Sliver with Sliver Blade

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	150	7515	218	0.47	35
Med (9 th)	92	4540	547	0.14	8
Low (1 th)	28	612	340	0.04	2

Energy Guide FTC			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	3410	\$ 6	160