
# **LEVON™ DC**

# FPD7916\*\* Ceiling Fan



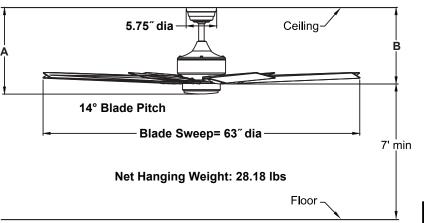

	Α	В
Fan w/6" downrod	16.27"	14.40″
Fan w/12" downrod	22.27"	20.40"
Fan w/18" downrod	28.27"	26.40"
Fan w/24" downrod	34.27"	32.40"
Fan w/36" downrod	46.27"	44.40"
Fan w/48" downrod	58.27"	56.40"
Fan w/60" downrod	70.27"	68.40"
Fan w/72" downrod	82.27"	80.40"

Available Finish			
BN	Brushed Nickel with Brushed Nickel Blade		
DZ	Dark Bronze with Dark Walnut Blade		

#### **INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

#### **ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

#### **MOTOR SPECS:**

DC-165M sensorless DC motor is designed for optimal performance with this fan.

### **BLADES:**

A set of eight 27" composite blades is included.

## **CONTROL OPTIONS:**

TR39 hand-held DC fan remote control is included. Push botton remote control has 6 fan speeds, infinite light levels, reverse and off button. Optional TW40 wall control is available—sold separately. Instructions are provided with each control.

#### **LIGHTING OPTIONS:**

One 18-watt dimmable LED included.

Airflow / Energy Efficiency Info (120V) Energy Star test with BPW7912 Blade	
	т

Energy Star test with Dr W7512 Blade					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	51	3083	1101	0.05	3
II	68	3920	817	0.08	5
III	86	5040	586	0.13	9
IV	103	5953	425	0.19	14
V	120	6857	298	0.31	23
VI	134	7817	230	0.42	34

Energy Guide FTC				
Power (W <sub>ave</sub> ) Total Air Delivery (CFM <sub>ave</sub> )		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)	
21	5424	6	256	

Light Bulb Information (120V)				
Bulb Type Watts		Lumens Amount	Color Temp	CRI
LED	18	1350	3000	80%

# **DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". The fan can be mounted on a sloped ceiling up to 27°. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

#### **LOCATION USE:**

Fan is rated for dry and damp locations.