




FANIMATION
studios collection

BERLIN™

LP8064B** 52" Ceiling Fan

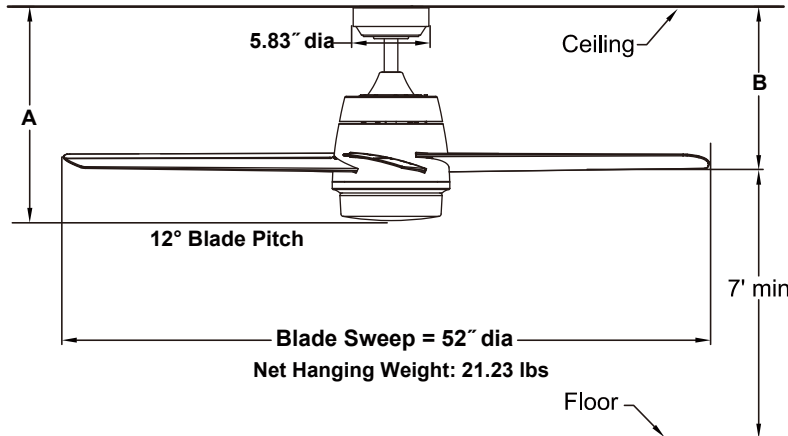

	A	B
Fan w/4.5" downrod	16.48"	12.63"
Fan w/12" downrod	23.98"	20.13"
Fan w/18" downrod	29.98"	26.13"
Fan w/24" downrod	35.98"	32.13"
Fan w/36" downrod	47.98"	44.13"
Fan w/48" downrod	59.98"	56.13"
Fan w/60" downrod	71.98"	68.13"
Fan w/72" downrod	83.98"	80.13"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 23" plastic blades is included.

CONTROL OPTIONS:

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional CWRL4**, WC2WH and WR501WH wall controls, BTCR9, CRL4WH hand held remote controls and BTR9 and WFR50 receiver are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Available Finishes

LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass
LAZ	Aged Bronze with Aged Bronze Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	172	6165	113	0.46	55
Med	117	4034	127	0.34	32
Low	76	2745	198	0.23	14

Energy Guide FTC

Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
36	4562	10	127

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%