


VICTORIA HARBOR™

**LP8242SBLCH
52" Ceiling Fan**

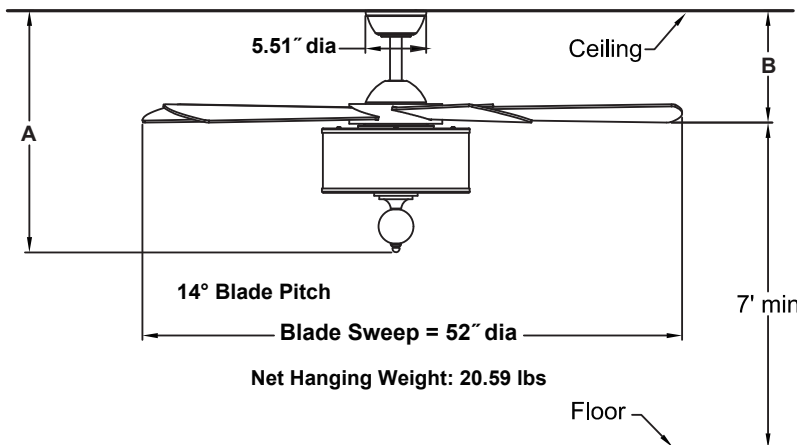

	A	B
Fan w/ 6" downrod	22.04"	10.22"
Fan w/12" downrod	28.04"	16.22"
Fan w/18" downrod	34.04"	22.22"
Fan w/24" downrod	40.04"	28.22"
Fan w/36" downrod	52.04"	40.22"
Fan w/48" downrod	64.04"	52.22"
Fan w/60" downrod	76.04"	64.22"
Fan w/72" downrod	88.04"	76.22"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 24" reversible plywood blades is included.

CONTROL OPTIONS:

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WR501WH wall control and BTCT9 hand-held remote control with receiver unit and BTR9 receiver unit and WFR50 WiFi receiver unit are available —sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Three 4-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

Available Finishes

Fan / Housing Assembly		Blades
CH	Chrome	Black / Dark Walnut with Ivory Fabric Shade

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	183	5543	81	0.58	68
Med	134	3999	107	0.45	37
Low	74	2063	162	0.26	13

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
45	3653	12	87

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	4	3	960	2700	80%