
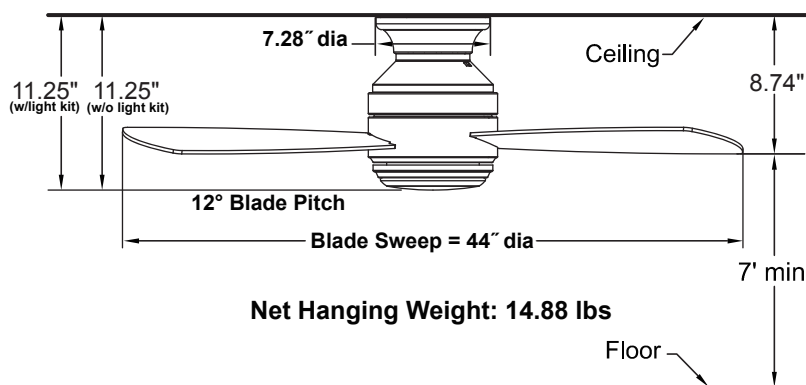


LEVEL™

LP8347** 44" Ceiling Fan

Ceiling Bracket
Width of the screw slot



Available Finishes

LAZ	Aged Bronze with Aged Bronze blades and Opal Frosted Glass / Steel Cap
LBN	Brushed Nickel with Gray blades and Opal Frosted Glass / Steel Cap
LGR	Matte Greige with Matte Greige blades and Opal Frosted Glass / Steel Cap
LMW	Matte White with Matte White blades and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	250	4536	88	0.43	51
Med	183	3358	123	0.32	27
Low	117	2343	179	0.22	13

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
31	2051	9	66

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	17.5	1	1700	3000	80%

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 12 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 19" plywood blades is included.

CONTROL OPTIONS:

CW60WH-8347 wall control is included. This wall control has 3 fan speeds switch and light dimming switch. The reverse switch is located on the top housing. Optional CW1SW wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 17.5-watt LED included.

LOCATION USE:

Fan is rated for dry location only.