


**CREASE™**

**LP8357LMW**  
**36" Ceiling Fan**  
**Lowes Item #747659**

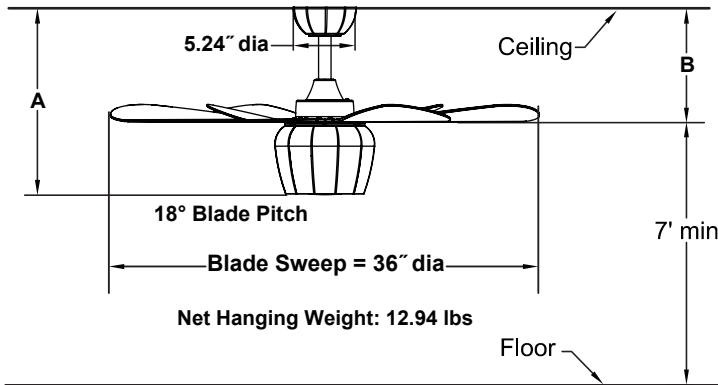

|                   | A      | B      |
|-------------------|--------|--------|
| Fan w/ 6" downrod | 16.05" | 9.97"  |
| Fan w/12" downrod | 22.05" | 15.97" |
| Fan w/18" downrod | 28.05" | 21.97" |
| Fan w/24" downrod | 34.05" | 27.97" |
| Fan w/36" downrod | 46.05" | 39.97" |
| Fan w/48" downrod | 58.05" | 51.97" |
| Fan w/60" downrod | 70.05" | 63.97" |
| Fan w/72" downrod | 82.05" | 75.97" |

**Available Finishes**

|    |                                     |
|----|-------------------------------------|
| MW | Matte White with Opal Frosted Glass |
|----|-------------------------------------|

**Airflow / Energy Efficiency Info (120V)**

| Fan Speed | Max RPM | CFM  | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High      | 253     | 2735 | 56          | 0.41 | 49    |
| Med       | 159     | 1688 | 81          | 0.28 | 21    |
| Low       | 84      | 833  | 86          | 0.18 | 10    |

**Light Bulb Information (120V)**

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| minican   | 75    | 1   | 836           | 2700       | 99% |

**Energy Guide FTC**

| Power (W <sub>ave</sub> ) | Total Air Delivery (CFM <sub>ave</sub> ) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 30                        | 1693                                     | 9                                 | 56                             |

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 10 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of six 16" plastic blades is included.

**CONTROL OPTIONS:**

TR400S hand-held remote control is included. Push button remote control has 3 fan speeds, infinite light levels, fan/light timer and off button. The reverse switch is located on the top housing. Optional CW1SW, CW2, CWRL4 and CW60WH wall controls and BTCR9, C4, CRL8TS and CRL4WH hand-held remote controls with receiver unit and BTR9 receiver unit are available—sold separately.

**LIGHTING OPTIONS:**

One 75-watt minican bulb included.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 6" long downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only.