


ASH™

# LP8365LBI

## 48" Ceiling Fan

Lowes Item #747616

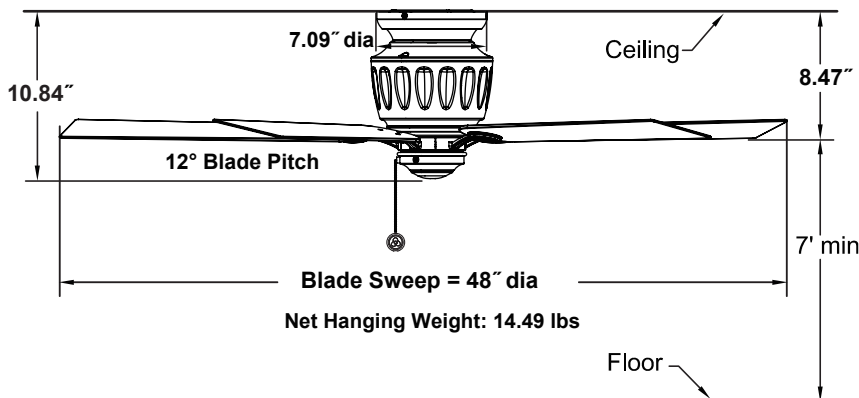

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 20" reversible plastic blades is included.

### CONTROL OPTIONS:

Three fan speeds pull chain control included. The reverse switch is located on the switch housing. Optional CW1, CW1SW, CW2, CW5, CWRL4 and CW60WH wall controls available—sold separately. Optional BTR9, C4, CRL8TS and CRL4WH remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

### LOCATION USE:

Fan is rated for damp locations.

### Available Finishes

BI	Black Iron with Black/Weathered Wood Blade
----	--

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	190	4915	93	0.44	53
Med	133	3466	126	0.32	28
Low	75	2034	177	0.21	12

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
33	2792	9	84