


EDGEWOOD® SERIES

TF971** Deluxe Wet Locaton Fan

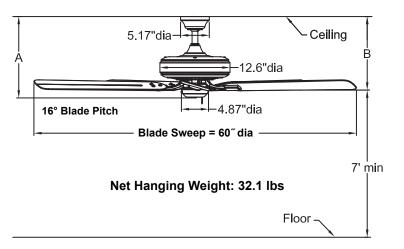

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

212 x 25 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 26" all-weather composite wood blades is included.

CONTROL OPTIONS:

Optional CW1, CW1SW, CW2, CW5, CWRL4 and CW60WH wall controls are available—sold separately. Optional BTCR9, C4, CRL4WH and CRL8TS remote controls with receiver unit and BTR9 receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional wet-location downrods (DR1SS) available in 12",18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry, damp and wet locations.

	Α	В
Fan w/4.5" downrod	14.62"	13.22"
Fan w/12" downrod	22.12"	20.72"
Fan w/18" downrod	28.12"	26.72"
Fan w/24" downrod	34.12"	32.72"
Fan w/36" downrod	46.12"	44.72"
Fan w/48" downrod	58.12"	56.72"
Fan w/60" downrod	70.12"	68.72"
Fan w/72" downrod	82.12"	80.72"

Available Finishes				
Fan / Housing Assembly		Blades - Traditional		
ΑZ	Aged Bronze	Dark Cherry		
OB	Oil-rubbed Bronze	Dark Cherry		
WH	White	White		

Airflow / Energy Efficiency Info (120V)							
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts		
High	159	8963	107	0.73	84		
Med	115	6596	132	0.56	50		
Low	74	4001	182	0.37	22		

Energy Guide FTC					
Power (W _{ave}) Total Air Delivery (CFM _{ave})		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)		
48	4594	13	96		