


VENTANA™

**FP8032SB
Ceiling Fan**

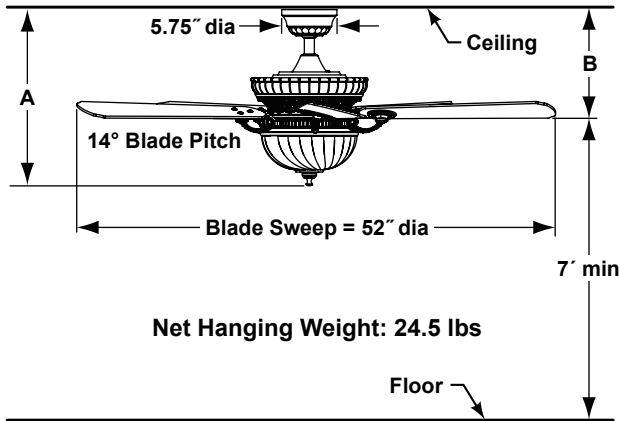

	A	B
Fan w/4.5" downrod	18.38"	10.59"
Fan w/12" downrod	25.88"	18.09"
Fan w/18" downrod	31.88"	24.09"
Fan w/24" downrod	37.88"	30.09"
Fan w/36" downrod	49.88"	42.09"
Fan w/48" downrod	61.88"	54.09"
Fan w/60" downrod	73.88"	66.09"
Fan w/72" downrod	85.88"	78.09"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 17 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

BLADE SETS:

A set of five 20.7" reversible mahogany/walnut wood blades is included.

CONTROL OPTIONS:

TR24WH hand-held remote control with wall mount is included. Push button remote control has 3 fan speeds, infinite light levels and off button. Optional CWRL4 wall control, CRL4WH and CRL8TS hand-held remote control are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Two-bulb (50-watt halogen minican bulbs -included) downlight fixture is included with this fan assembly. Maximum downlight wattage not to exceed 100 watts.

DOWNROD OPTIONS:

The Ventana™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Ventana™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finish	
SB	Sedona Beige with Amber Tea glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	172	5634	75	0.58	75
Med	118	3529	88	0.49	40
Low	60	1496	115	0.28	13