


**WYLDE™**

# FPD6220\*\* 72" Ceiling Fan

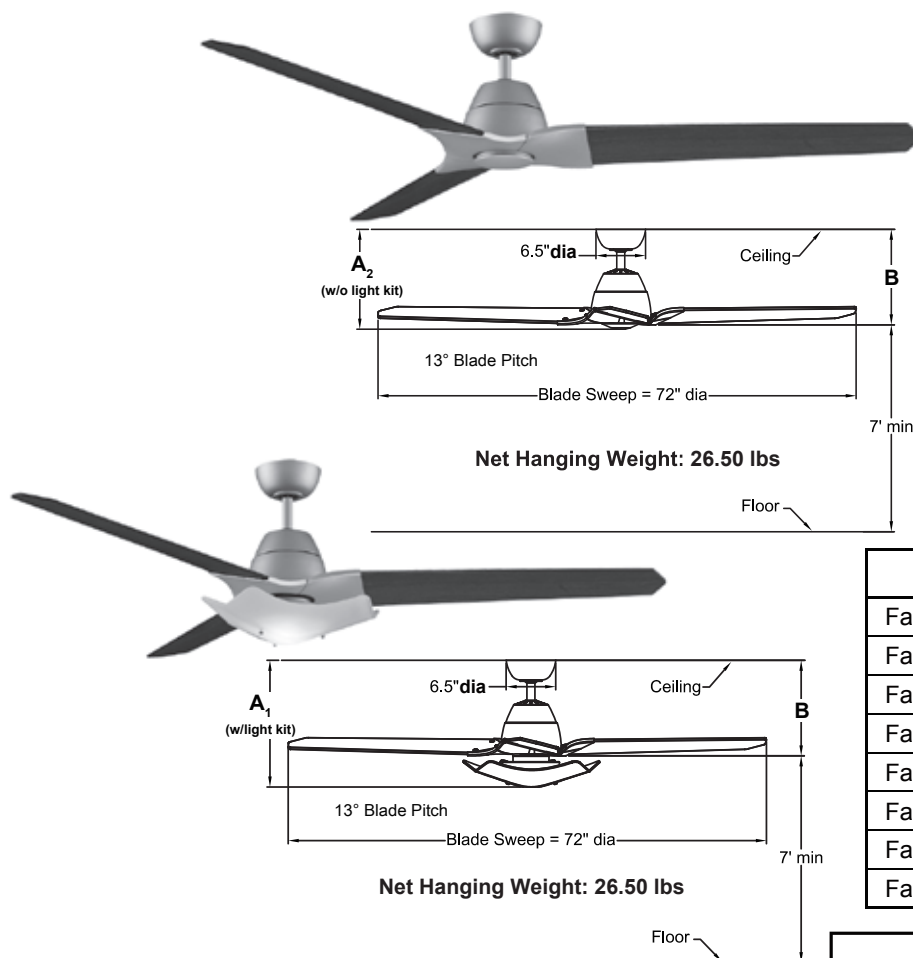

	A <sub>1</sub>	A <sub>2</sub>	B
Fan w/4.5" downrod	16.61"	13.10"	12.53"
Fan w/12" downrod	24.11"	20.60"	20.03"
Fan w/18" downrod	30.11"	26.60"	26.03"
Fan w/24" downrod	36.11"	32.60"	32.03"
Fan w/36" downrod	48.11"	44.60"	44.03"
Fan w/48" downrod	60.11"	56.60"	56.03"
Fan w/60" downrod	72.11"	68.60"	68.03"
Fan w/72" downrod	84.11"	80.60"	80.03"

## Available Finishes

MW	Matte White with Matte White and Frosted White Glass/Steel Cap
SN	Satin Nickel with Cherry/Walnut blade and Frosted White Glass/Steel Cap

## INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## MOTOR SPECS:

DC-165M DC motor is designed for optimal performance with this fan.

## BLADES:

A set of three reversible plywood blades is included.

## CONTROL OPTIONS:

TR39 hand-held DC fan remote control is included. Push button remote control has 6 fan speeds, infinite light levels, reverse and off button. Optional TW40 wall control is available—sold separately. Instructions are provided with each control.

## LIGHTING OPTIONS:

Two 75-watt halogen minican bulbs included. See our catalog or visit [www.fanimation.com](http://www.fanimation.com) for available lighting options.

## DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

## LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
I	51	3596	734	0.10	5
II	64	4640	636	0.12	7
III	77	5473	558	0.15	10
IV	91	6425	456	0.20	14
V	103	7198	355	0.27	20
VI	119	8087	270	0.38	30