


AIRE DUO™

LP8066LBN (Lowes Item #921297) LP8066** 48" Ceiling Fan



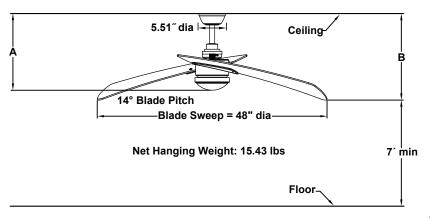

	Α	В
Fan w/ 6"downrod	15.83"	17.78″
Fan w/12" downrod	21.83"	23.78"
Fan w/18" downrod	27.83"	29.78"
Fan w/24" downrod	33.83"	35.78"
Fan w/36" downrod	45.83"	47.78"
Fan w/48" downrod	57.83"	59.78"
Fan w/60" downrod	69.83"	71.78″
Fan w/72" downrod	81.83"	83.78"
•		

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of two 32" plywood blades is included.

CONTROL OPTIONS:

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH and CWRL4 wall controls. BTCR9 and CRL4WH hand held remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt LED included.

	<i>_</i>)
Fan w/ 6"downrod	15.83″	17.78"
Fan w/12" downrod	21.83"	23.78"
Fan w/18" downrod	27.83"	29.78"
Fan w/24" downrod	33.83"	35.78"
Fan w/36" downrod	45.83"	47.78"
Fan w/48" downrod	57.83"	59.78"
Fan w/60" downrod	69.83"	71.78″
Fan w/72" downrod	81.83"	83.78"
·	·	·

	Available Finishes		
LBN	Brushed Nickel with Black Blade and Opal Frosted Glass		
LBL	Black with Black Blade and Opal Frosted Glass		
LGR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	176	4638	107	0.36	43
Med	126	3060	127	0.33	24
Low	76	1728	188	0.17	9

Energy Guide FTC				
Power (Wave) Total Air Delivery (CFMave)		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)	
28	3274	8	116	

Light Bulb Information (120V)					
Bulb Type Watts QTY Lumen		Lumens Amount	Color Temp	CRI	
LED	18	1	1400	3000	90%

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 6" downrod (DRT1-6). Optional downrods are available in 12",18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.