


**AIRE DROP™**

**LP8068LAZ**  
(Lowe's Item #921296)  
**LP8068LBN**  
(Lowe's Item #921295)  
**LP8068LMW**  
**52" Ceiling Fan**

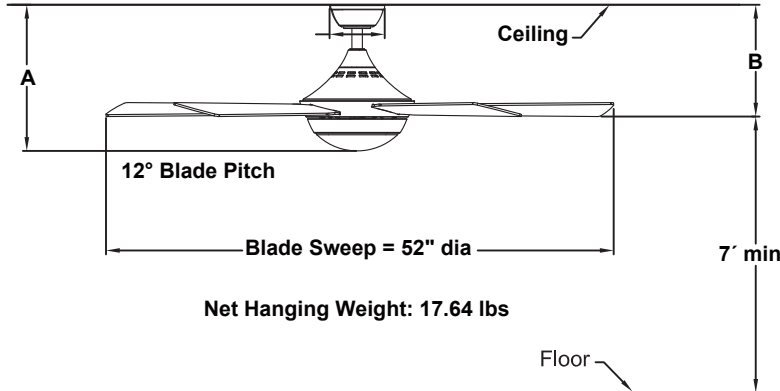

	A	B
Fan w/4.5" downrod	14.70"	11.40"
Fan w/12" downrod	22.20"	18.90"
Fan w/18" downrod	28.20"	24.90"
Fan w/24" downrod	34.20"	30.90"
Fan w/36" downrod	46.20"	42.90"
Fan w/48" downrod	58.20"	54.90"
Fan w/60" downrod	70.20"	66.90"
Fan w/72" downrod	82.20"	78.90"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

153 x 20 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of five 23" plywood blades is included.

**CONTROL OPTIONS:**

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH and CWRL4 wall controls, BTCR9 and CRL4WH hand held remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

**LIGHTING OPTIONS:**

One 18-watt LED included.

**DOWNROD OPTIONS:**

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry location only.

Available Finishes	
LAZ	Aged Bronze with Cherry/Dark Walnut Reversible Blade and Opal Frosted Glass
LBN	Brushed Nickel with Gray/Dark Walnut Reversible Blade and Opal Frosted Glass
LMW	Matte White with Matte White Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	171	5693	87	0.55	66
Med	123	3722	120	0.37	31
Low	66	1992	162	0.24	12

Energy Guide FTC			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
41	3868	12	94

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%