


**LAKE LAGODA™**

**LP8300\*\***  
**60" Ceiling Fan**  
**Lowes Item #593754**

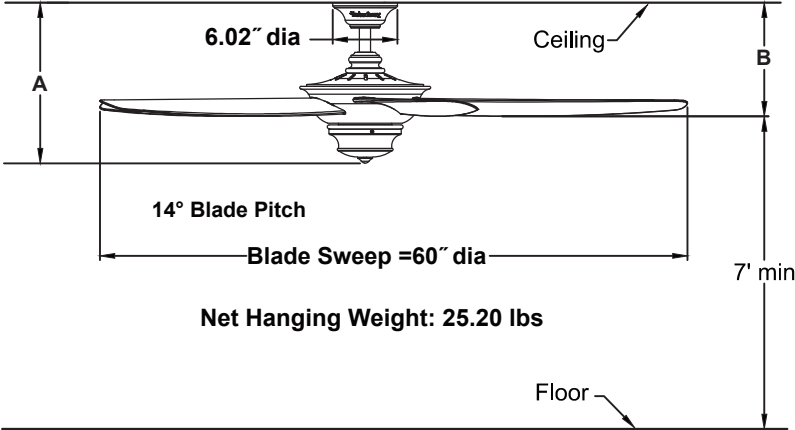

	A	B
Fan w/4.5" downrod	15.25"	11.25"
Fan w/12" downrod	22.75"	18.75"
Fan w/18" downrod	28.75"	24.75"
Fan w/24" downrod	34.75"	30.75"
Fan w/36" downrod	46.75"	42.75"
Fan w/48" downrod	58.75"	54.75"
Fan w/60" downrod	70.75"	66.75"
Fan w/72" downrod	82.75"	78.75"

Available Finishes		
Fan / Housing Assembly		Blades
AZ	Aged Bronze	Walnut

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	120	7108	118	0.51	60
Med	93	5444	143	0.46	38
Low	54	3544	207	0.34	17

**INSTALLATION REQUIREMENTS:**  
 Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**  
 Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**  
 188 x 25 motor is designed for optimal performance with this fan.

**BLADES:**  
 A set of five 27" plastic blades is included.

**CONTROL OPTIONS:**  
 TR380 hand-held remote control is included. Push button remote control has 3 fan speeds and off button.

**DOWNROD OPTIONS:**  
 Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Call technical support for more information.

**LOCATION USE:**  
 Fan is rated for dry and damp locations.