




BP220B**1 Series Ceiling Fans

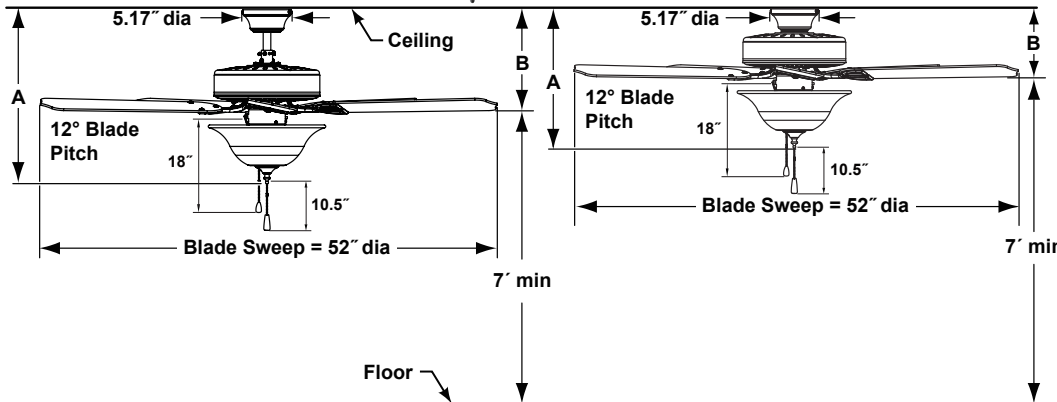

Net Hanging Weight: 18.5 lbs

| | A | B |
|---------------------------------------|--------|--------|
| Fan In Close to Ceiling Configuration | 15.48" | 7.74" |
| | A | B |
| Fan w/4.5" downrod | 19.30" | 11.10" |
| Fan w/12" downrod | 26.80" | 18.60" |
| Fan w/18" downrod | 32.80" | 24.60" |
| Fan w/24" downrod | 38.80" | 30.60" |
| Fan w/36" downrod | 50.80" | 42.60" |
| Fan w/48" downrod | 62.80" | 54.60" |
| Fan w/60" downrod | 74.80" | 66.60" |
| Fan w/72" downrod | 86.80" | 78.60" |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 20.7" traditional wood blades is included.

CONTROL OPTIONS:

Optional WC2WH and WR501WH wall controls, BTCR9 and CR500 remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Three 4-watt LED bulbs included.

DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 14°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only. This fan is for room up to 400 sq ft.

Available Finishes

| Fan Assembly / Glass | Blades - Traditional |
|-----------------------------------|----------------------------|
| BL – Black | Black / walnut reversible |
| MW – Matte white / Frosted White | Matte white |
| OB – Oil-rubbed bronze / Amber | Cherry / walnut reversible |
| SN – Satin nickel / Frosted white | Cherry / walnut reversible |

Airflow / Energy Efficiency Info—Standard (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 154 | 4461 | 90 | 0.41 | 50 |
| Med | 100 | 2847 | 137 | 0.27 | 21 |
| Low | 58 | 1495 | 185 | 0.17 | 8 |

Airflow / Energy Efficiency Info—Hugger (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 150 | 3962 | 80 | 0.41 | 50 |
| Med | 100 | 2648 | 127 | 0.27 | 21 |
| Low | 58 | 1495 | 186 | 0.17 | 8 |

Energy Guide FTC—Standard

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|------------------------------------------|-----------------------------------|--------------------------------|
| 30 | 3071 | 8 | 102 |

Energy Guide FTC—Hugger

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|------------------------------------------|-----------------------------------|--------------------------------|
| 30 | 2779 | 8 | 92 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 4 | 3 | 1200 | 2700 | 90% |