


# BP225BOB1 Series Ceiling Fans

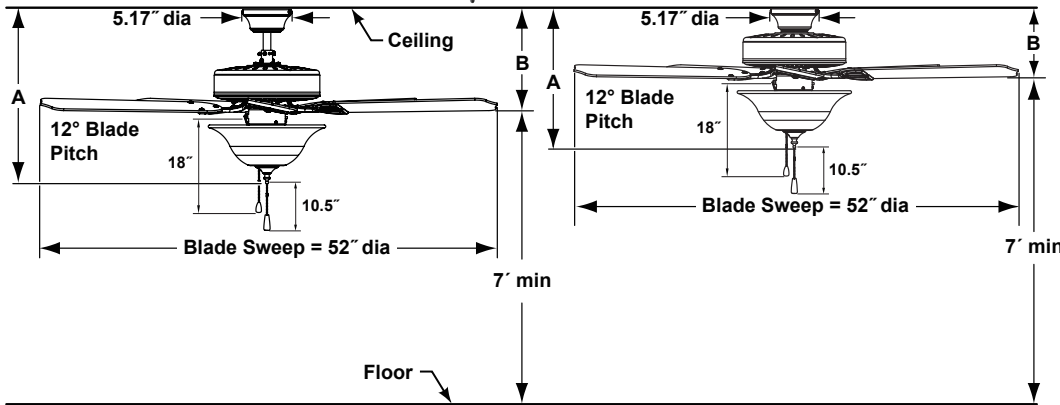

Net Hanging Weight: 18.5 lbs

	A	B
Fan In Close to Ceiling Configuration	15.48"	7.74"

	A	B
Fan w/4.5" downrod	19.30"	11.10"
Fan w/12" downrod	26.80"	18.60"
Fan w/18" downrod	32.80"	24.60"
Fan w/24" downrod	38.80"	30.60"
Fan w/36" downrod	50.80"	42.60"
Fan w/48" downrod	62.80"	54.60"
Fan w/60" downrod	74.80"	66.60"
Fan w/72" downrod	86.80"	78.60"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 20.7" traditional wood blades is included.

### CONTROL OPTIONS:

Optional WC2WH and WR501WH wall controls, BTCR9 and CR500 remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

### LIGHTING OPTIONS:

Three 4-watt LED bulbs included.

### DOWNROD OPTIONS:

Dual mount for flush mount application or 1" dia x 4.5" long downrod. Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 14°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry locations only. This fan is for room up to 400 sq ft.

### Available Finishes

Fan Assembly / Glass	Blades - Traditional
OB – Oil-rubbed bronze / Frosted White	Cherry / walnut reversible

### Airflow / Energy Efficiency Info—Standard (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	154	4461	90	0.41	50
Med	100	2847	137	0.27	21
Low	58	1495	185	0.17	8

### Airflow / Energy Efficiency Info—Hugger (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	150	4033	84	0.41	50
Med	100	2592	123	0.27	21
Low	58	1483	176	0.17	8

### Energy Guide FTC—Standard

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	3071	8	102

### Energy Guide FTC—Hugger

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
30	2779	8	92

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	4	3	1200	2700	90%