


EDGEWOOD® SERIES

TF910** Wet Location Fan

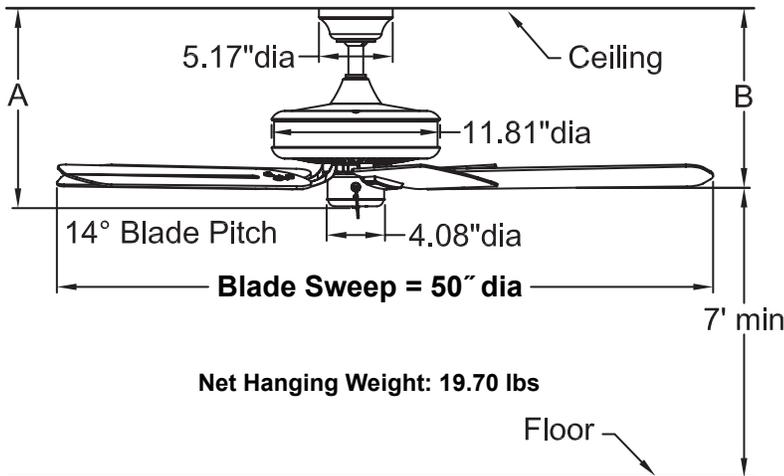

	A	B
Fan w/4.5" downrod	13.82"	12.44"
Fan w/12" downrod	21.32"	19.94"
Fan w/18" downrod	27.32"	25.94"
Fan w/24" downrod	33.32"	31.94"
Fan w/36" downrod	45.32"	43.94"
Fan w/48" downrod	57.32"	55.94"
Fan w/60" downrod	69.32"	67.94"
Fan w/72" downrod	81.32"	79.94"

Available Finishes		
Fan / Housing Assembly	Blades - All-weather	
AZ Aged bronze	Dark cherry	
BL Black	Black	
OB Oil-rubbed Bronze	Dark cherry	
WH White	White	

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

188 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 21" all-weather composite traditional blades is included.

CONTROL OPTIONS:

Optional CW5, WC1WH, WC2WH, WR500WH, WR501WH and CWRL4 wall controls are available—sold separately. Optional BTCR9, CRL4WH and CR500 remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available. See our catalog or visit www.fanimation.com for available lighting options.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional wet-location downrods (DR1SS) available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call your local dealer for more information.

LOCATION USE:

Fan rated for dry, damp and wet locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	168	4919	93	0.44	53
Med	109	2980	124	0.30	24
Low	58	1542	177	0.18	9

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
32	3336	9	104