


**Rotation™**

# FP8018\*\* Orbital Ceiling Fan

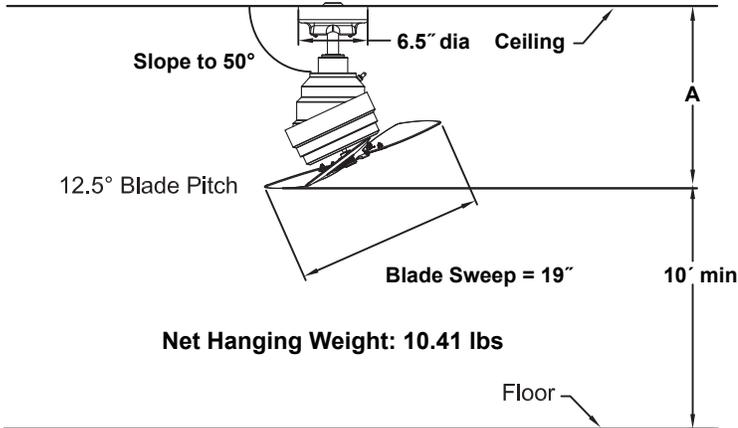

	<b>A</b>
Fan w/6" downrod	19.54"
Fan w/12" downrod	25.54"
Fan w/18" downrod	31.54"
Fan w/24" downrod	37.54"
Fan w/36" downrod	49.54"
Fan w/48" downrod	61.54"
Fan w/60" downrod	73.54"
Fan w/72" downrod	85.54"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

82 x 25 AC motor is designed for optimal performance with this fan.

### CONTROL OPTIONS:

CWFP8018 3-speed fan-only wall control is included. The reverse switch is located on the motor assembly. Optional CWRL4, WC1WH and WR500WH wall controls, BTR9, CRL4WH and CR500 hand held remote controls, BTR9 receiver unit and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 50°. Most sloped ceiling installations require a standard 6" downrod or longer downrod. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 100 sq ft.

### Available Finish

BL	Black with Black Blade
BN	Brushed Nickel with Brushed Nickel Blade
GR	Matte Greige with Weathered Wood Blade
MW	Matte White with Matte White Blade

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1093	1767	32	0.46	55
Med	824	1299	36	0.38	36
Low	571	927	43	0.29	21

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
39	1373	11	35