


ARCHIVE™

LP3072
24" Ceiling Fan**

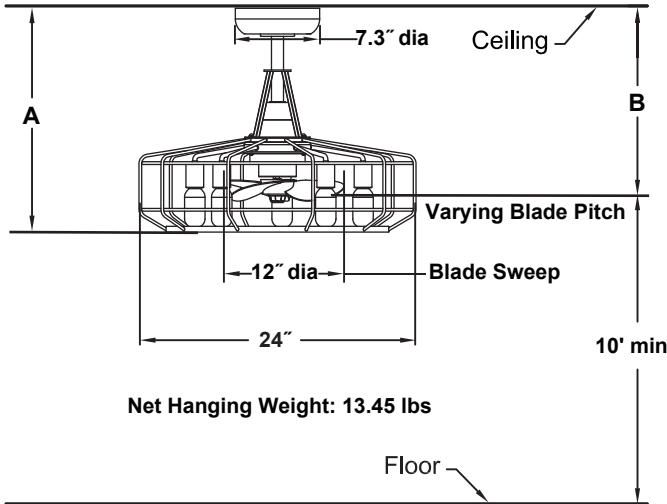

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60Hz, 15 amp circuit.

MOTOR SPECS:

79.5 x 64 AC motor is designed for optimal performance with this fan.

CONTROL OPTIONS:

TR500S hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels, fan timer and off button. Optional WC2WH, WR501WH wall controls and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

Five 6-watt dimmable LED bulbs included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 8" downrod (DRT1-8). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. Fan can be mounted on a sloped ceiling up to 20°. Most sloped ceiling installations require a standard 8" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for slope an angles up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for rooms up to 100 sq ft.

	A	B
Fan w/8" downrod	19.37"	15.79"
Fan w/12" downrod	23.37"	19.79"
Fan w/18" downrod	29.37"	25.79"
Fan w/24" downrod	35.37"	31.79"
Fan w/36" downrod	47.37"	43.79"
Fan w/48" downrod	59.37"	55.79"
Fan w/60" downrod	71.37"	67.79"
Fan w/72" downrod	83.37"	79.79"

Available Finishes	
LBL	Black with Black Blade
LBN	Brushed Nickel with Gray Blade
LGR	Matte Greige with Weathered Wood Blade

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	1325	954	39	0.21	25
Med	1070	801	44	0.19	18
Low	770	573	48	0.16	12

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
20	767	6	38

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	6	5	2500	2700	90%