



AIREFLUSH™

LP6804**
52" Ceiling Fan

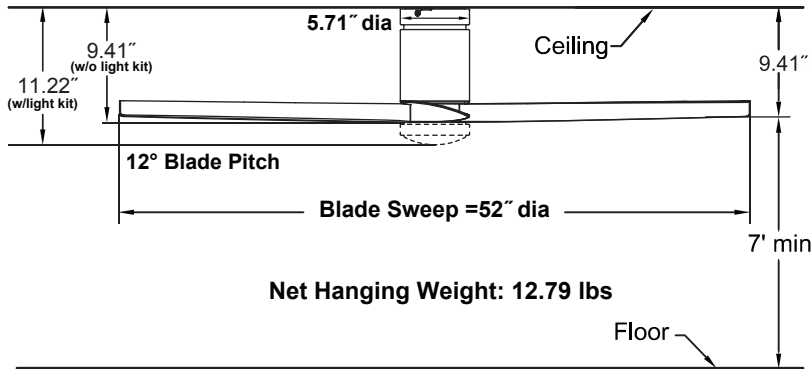

Ceiling Bracket
Width of the screw slot



INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan.

BLADE SET:

A set of four 25" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 16-watt CCT LED (3000K/4000K/5000K) included.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

Available Finishes

LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap
LMW	Matte White with Matte White Blade and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	166	5809	218	0.40	27
Med	103	3442	524	0.11	7
Low	29	866	328	0.05	3

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
18	3493	5	193

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	16	1	1500	3000/4000/5000	90%