


YARDLEY™

LP6821LAZ (Lowes Item #5127852) 64" Ceiling Fan

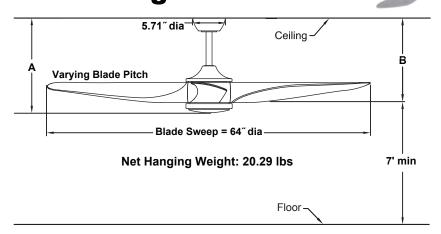

| | Α | В |
|-------------------|--------|--------|
| Fan w/8" downrod | 16.51" | 14.80″ |
| Fan w/12" downrod | 20.51" | 18.80″ |
| Fan w/18" downrod | 26.51" | 24.80" |
| Fan w/24" downrod | 32.51" | 30.80″ |
| Fan w/36" downrod | 44.51" | 42.80" |
| Fan w/48" downrod | 56.51" | 54.80" |
| Fan w/60" downrod | 68.51" | 66.80" |
| Fan w/72" downrod | 80.51" | 78.80″ |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC135 motor is designed for optimal performance with this fan.

BLADE SET:

A set of three 31" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (3000K/4000K/5000K) included.

Available Finishes LAZ Aged Bronze with Light Oak Blade and Opal Frosted Glass

| Airflow / Energy Efficiency Info (120V) | | | | | | |
|-----------------------------------------|---------|------|-------------|------|-------|--|
| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts | |
| High | 121 | 7999 | 335 | 0.36 | 24 | |
| Med | 78 | 5222 | 716 | 0.12 | 7 | |
| Low | 30 | 1787 | 863 | 0.05 | 2 | |

| Energy Guide FTC | | | | |
|--------------------------------------------------------------------|------|--------------------------------------|--------------------------------------|--|
| Power (W _{ave}) Total Air Delivery (CFM _{ave}) | | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) | |
| 17 | 5087 | 5 | 305 | |

| Light Bulb Information (120V) | | | | | |
|-------------------------------|-------|-----|------------------|----------------|-----|
| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
| LED | 18 | 1 | 1600 | 3000/4000/5000 | 90% |

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 8" long downrod (DRT1-8). Optional downrods are available in 12",18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.