


**KWINT™**

# LP6834LBL 52" Ceiling Fan

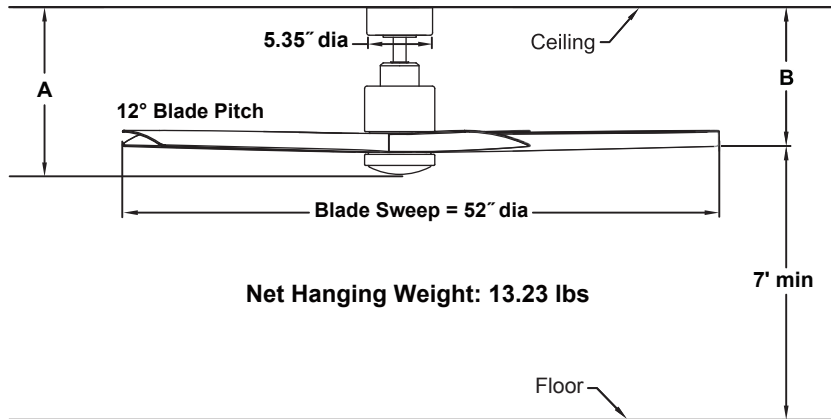

	A	B
Fan w/4.5" downrod	13.56"	11.68"
Fan w/12" downrod	21.06"	19.18"
Fan w/18" downrod	27.06"	25.18"
Fan w/24" downrod	33.06"	31.18"
Fan w/36" downrod	45.06"	43.18"
Fan w/48" downrod	57.06"	55.18"
Fan w/60" downrod	69.06"	67.18"
Fan w/72" downrod	81.06"	79.18"

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

100 x 30 DC motor is designed for optimal performance with this fan.

### BLADE SET:

A set of five 24.5" composite blades is included.

### CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

### LIGHTING OPTIONS:

One 16-watt CCT LED (3000K/4000K/5000K) included.

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 4.5" long downrod (DRT1-4.5). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

### Available Finishes

LBL	Black with Black Blade and Opal Frosted Glass
-----	---

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	161	6737	211	0.47	32
Med	102	4093	524	0.13	8
Low	29	1032	519	0.05	2

### Energy Guide FTC

Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
21	4063	6	192

### Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	16	1	1500	3000/4000/5000	90%