




RADIUS™

**LP7614LBN
60" Ceiling Fan**

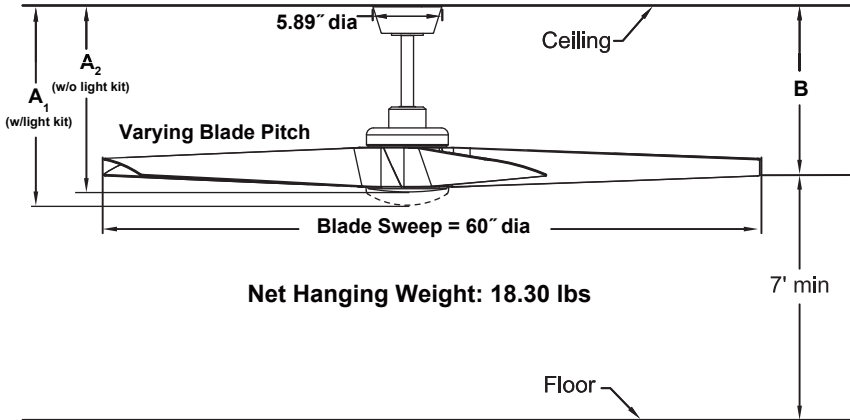

	A ₁	A ₂	B
Fan w/ 8" downrod	16.81"	15.69"	15.24"
Fan w/12" downrod	20.81"	19.69"	19.24"
Fan w/18" downrod	26.81"	25.69"	25.24"
Fan w/24" downrod	32.81"	31.69"	31.24"
Fan w/36" downrod	44.81"	43.69"	43.24"
Fan w/48" downrod	56.81"	55.69"	55.24"
Fan w/60" downrod	68.81"	67.69"	67.24"
Fan w/72" downrod	80.81"	79.69"	79.24"

Available Finishes	
LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC-135 sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:

A set of five 27" composite blades is included.

CONTROL OPTIONS:

TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (3000K/4000K/5000K) included.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 8" long downrod (DRT1-8). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16 th)	105	7081	255	0.41	28
Med (9 th)	70	4627	544	0.14	9
Low (1 th)	30	2013	977	0.05	2

Energy Guide FTC			
Power (Watt)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
19	4625	5	242

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1600	3000/4000/5000	90%