



## TABLE OF CONTENTS

Aviara <sup>TM</sup>	1/
Barlow <sup>TM</sup>	6
Islander™ DC	8
Kute <sup>™</sup> 44	24
Kute <sup>™</sup> 52	26
Kute <sup>™</sup> 60	28
Kute5™ 52	30
Lenzi <sup>TM</sup>	16
Paget <sup>TM</sup>	4
Spitfire™ AC 48	34
Spitfire™ AC 60	36
Spitfire™ DC 64	40
Spitfire™ DC 72	42
Spitfire™ DC 84	44
Spitfire™ DC 96	46
Starboard™ Light	12
Starboard™ No Light	10
TorchAire™ 52	18

TorchAire™ 64	20
TriAire™ Custom 44	60
TriAire™ Custom 48	62
TriAire™ Custom 52	64
TriAire™ Custom 56	66
TriAire™ Custom 60	68
TriAire™ Custom 64	70
TriAire™ Custom 72	72
TriAire™ Custom 84	74
Wrap™ Custom 44	50
Wrap™ Custom 52	
Wrap™ Custom 60	
Wrap™ Custom 72	56
Controls	75
Downrods	77
Close-to- & Sloped-Ceiling Kits	78
Finish Swatches	

# INDOOR/OUTDOOR FANS





RE-RELEASE



NEW FINISH & ACCESSORIES




















# **ACCESSORIES**







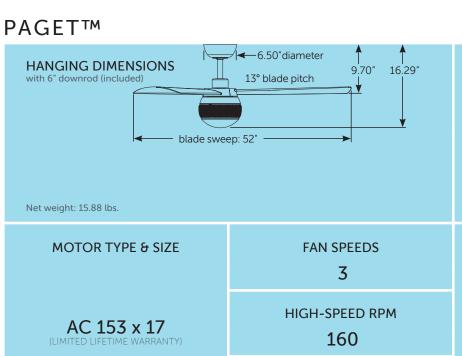

HIGH-SPEED CFM

5,429 CFM

LIGHTING SPECS

18W integrated LED

lumens: 1,700 CCT: 3,000k CRI: 90

**LOCATION RATING** 

TR500 handheld remote included

**CONTROL TYPE** 

<u>@@</u>@ **0**@0

**⊕ ⊕** 















Reverse switch on fan



18W LED with opal frosted glass

# **MOUNTING TYPE**







downrod 6" included up to 27° included















SCAN QR CODE FOR FULL IMAGE





#### **ENERGY GUIDE**

**AVERAGE SPEED** 

TOTAL AIR VOLUME

4,014 CFM

**ENERGY** USE

36 Watts

**ESTIMATED YEARLY ENERGY COST** 


\$10

AIRFLOW **EFFICIENCY** 

110 CFM/Watts

#### **CERTIFICATION**



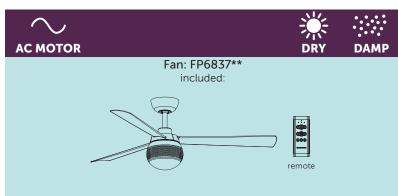

(sold separately)

mounting

Sloped Ceiling Ball (up to 42°) SCB1-52



Longer **Downrods** page 77



3-wire Fan + Light Wall Control WC2WH



2-wire Fan + Light Wall Remote WR501WH



WiFi Smart Receiver WFR50



#### FP6837\*\* motor & blade finish combinations



black + black with dark wicker







# **BARLOW<sup>TM</sup>**





 $<sup>\</sup>ensuremath{^{\star\star}}$  replace with available finish code below




#### FP6807\*\* motor & blade finish combinations






# ISLANDER DC™

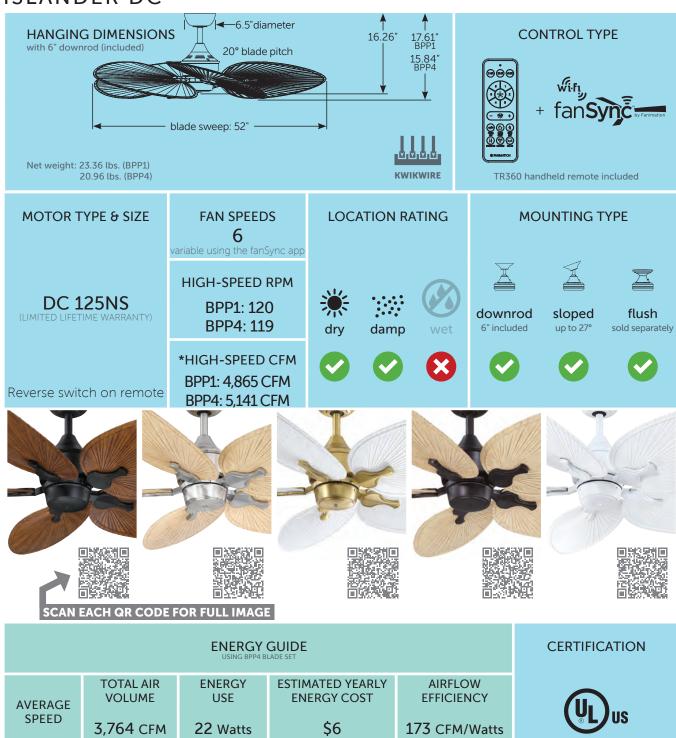

FANIMATION.COM

\*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

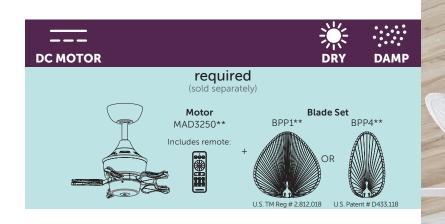

# optional accessories (sold separately)



CCK8002\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW406

#### ordering example



U.S. TM Reg # 2,812,018



#### motor finishes



MW

matte white



brushed nickel



#### BPP1 wide oval palm blade finish options







BPP4 narrow oval palm blade finish options











# STARBOARD NLTM

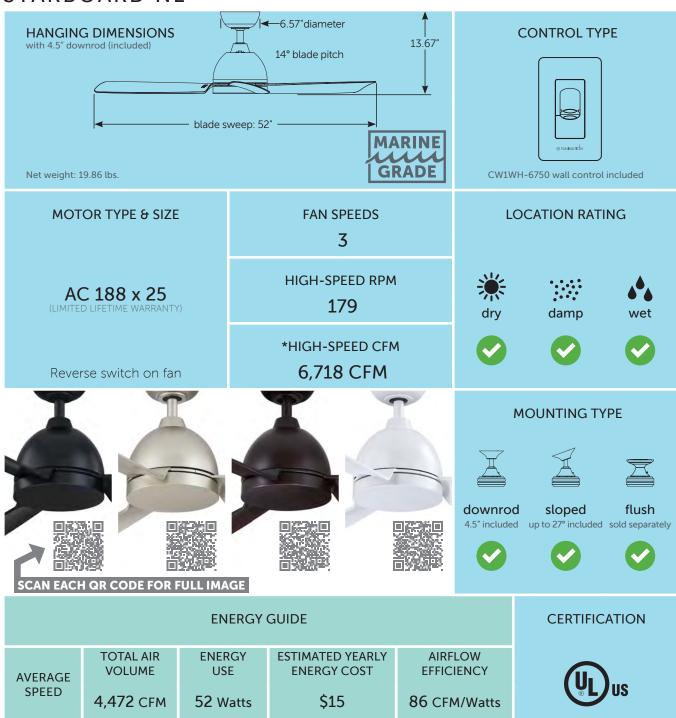

FANIMATION.COM

\*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

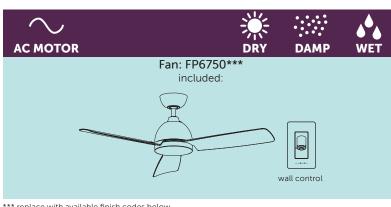

\*\*\* replace with available finish codes below

#### optional accessories


(sold separately)




#### FP6750\*\*\* motor & blade finish combinations



view larger swatches on page 79

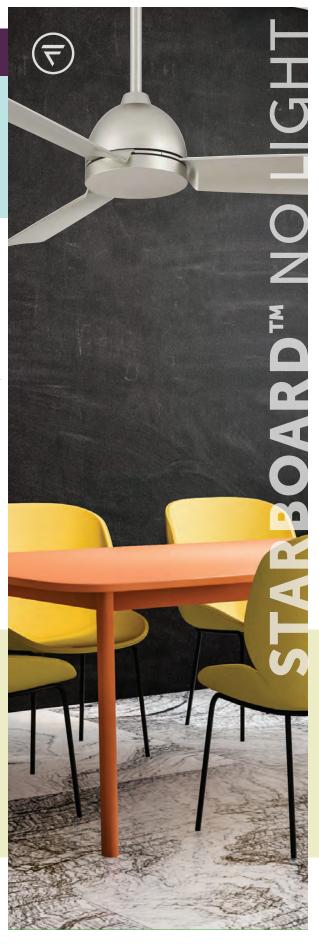

# STARBOARD™

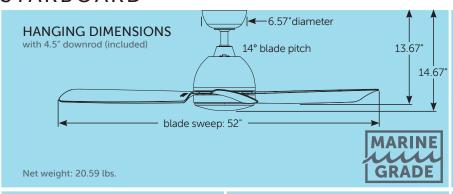



**MOTOR TYPE & SIZE** 

**FAN SPEEDS** 3

**LOCATION RATING** 

AC 188 x 25

HIGH-SPEED RPM 179

damp

\*HIGH-SPEED CFM 6,718 CFM





Reverse switch on fan

LIGHTING

LIGHTING SPECS

MOUNTING TYPE











lumens: 2,000 CCT: 3,000k CRI: 90

downrod

sloped

flush 4.5" included up to 27° included sold separately







24W LED with opal frosted glass



# **ENERGY GUIDE**

**AVERAGE SPEED** 

TOTAL AIR VOLUME

4,472 CFM

**ENERGY** USE

52 Watts

**ESTIMATED YEARLY ENERGY COST** 


\$15

**AIRFLOW EFFICIENCY** 

86 CFM/Watts

CERTIFICATION



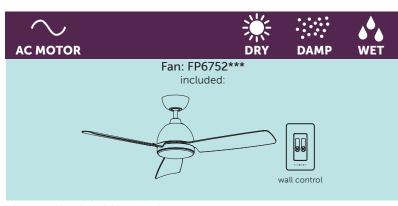

\*\*\* replace with available finish codes below

(sold separately)



nt rol





Longer Downrods page 77

3-wire Fan + Light Wall Control WC2WH

Wall Control
WC2WH

Wall Control
WI
WI

Wall Remote WR501WH

2-wire Fan + Light



2-wire Fan + light Wall Learn Remote WR506WH



& Receiver CR500 Fan + Light Learn Remote Control &

Receiver

CRL4WH

Remote Control



WFR50

2-wire Fan + Light

WiFi Smart

Receiver






FP6752\*\*\* motor & blade finish combinations



view larger swatches on page 79



# **AVIARATM**

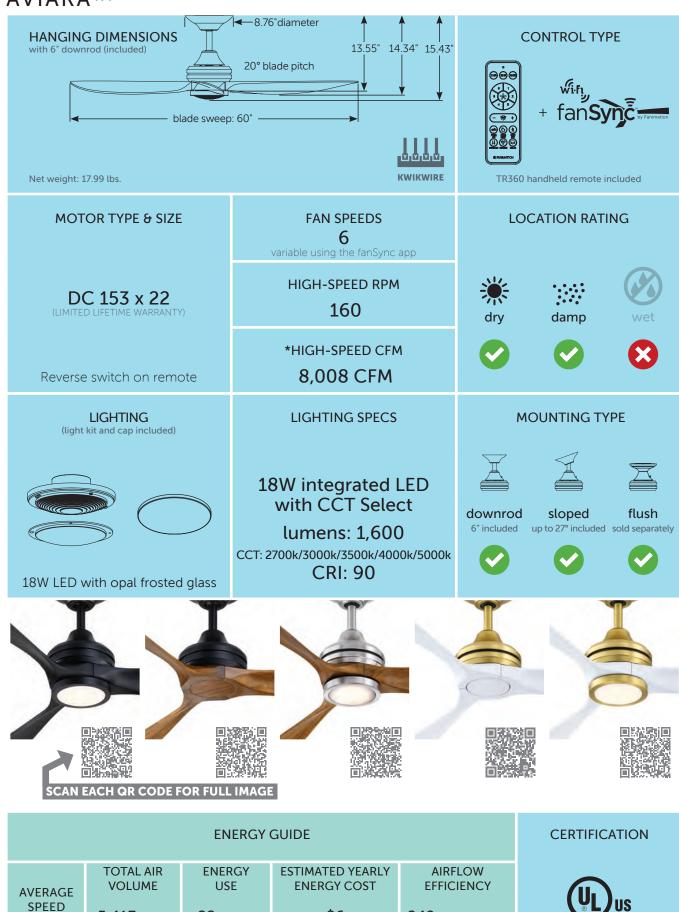


\$6

5,413 CFM

22 Watts

249 CFM/Watts

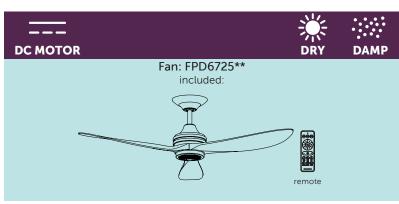

 $\ensuremath{^{\star\star}}$  replace with available finish code below

#### optional accessories

(sold separately)



Close-To-Ceiling Kit CCK6721\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Wall Remote TW406



#### FPD6725\*\* motor & blade finish combinations




view larger swatches on page 79

**BNK** 

brushed nickel + KOA



# **LENZITM**

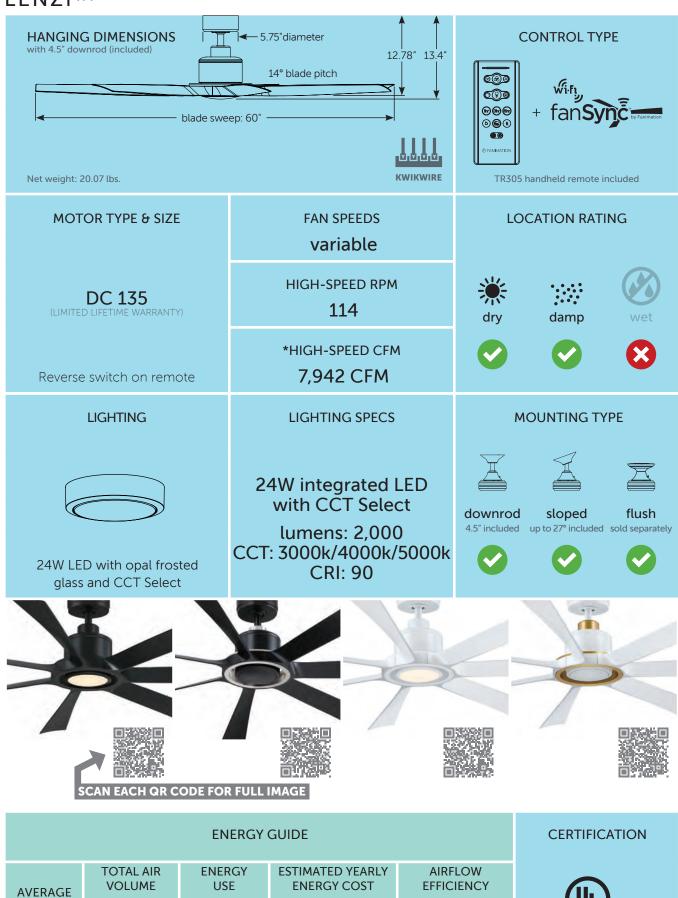


\$6

5,125 CFM

22 Watts

**SPEED** 

227 CFM/Watts

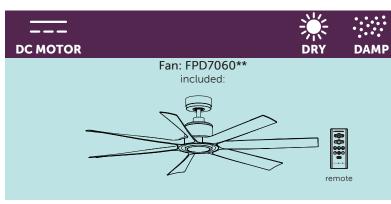

 $\ensuremath{^{\star\star}}$  replace with available finish code below

#### optional accessories

(sold separately)





Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



**2-wire Wall Remote** TW306



#### FPD7060\*\* motor & blade finish combinations




view larger swatches on page 79





ENERGY GUIDE					CERTIFICATION
AVERAGE SPEED	TOTAL AIR VOLUME  3,721 CFM	ENERGY USE 21 Watts	ESTIMATED YEARLY ENERGY COST \$6	AIRFLOW EFFICIENCY 178 CFM/Watts	<b>UL</b> us

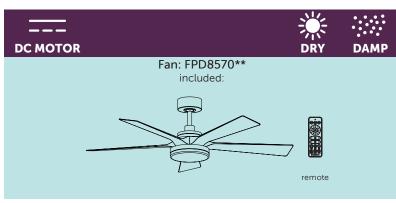

 $<sup>\</sup>ensuremath{^{\star\star}}$  replace with available finish code below

(sold separately)

mounting



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Wall Remote TW407




#### FPD8570\*\* motor & blade finish combinations




view larger swatches on page 79



# TORCHAIRE™ 64

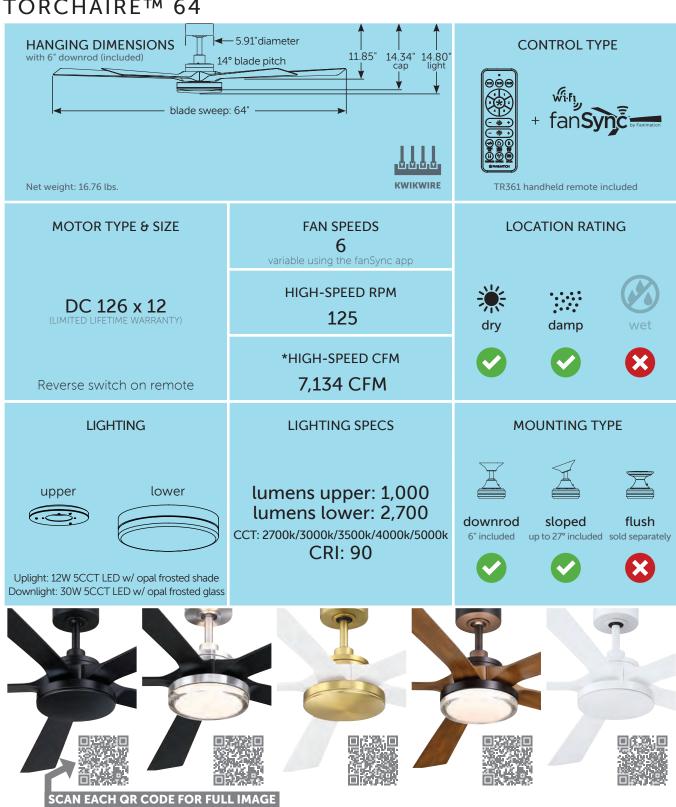

ENERGY GUIDE					CERTIFICATION
AVERAGE SPEED	TOTAL AIR VOLUME 5,090 CFM	ENERGY USE 23 Watts	ESTIMATED YEARLY ENERGY COST \$6	AIRFLOW EFFICIENCY 223 CFM/Watts	<b>UL</b> us

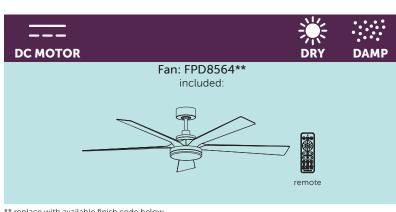

 $<sup>\</sup>ensuremath{^{\star\star}}$  replace with available finish code below

(sold separately)

mounting



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Wall Remote TW407



#### FPD8564\*\* motor & blade finish combinations



view larger swatches on page 79


brushed satin brass + matte white







### KUTE™ 44

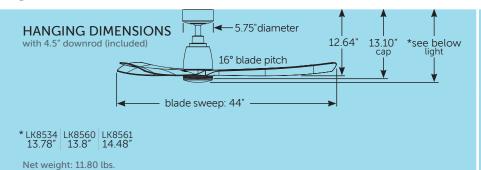



**MOUNTING TYPE** 

**MOTOR TYPE & SIZE** DC 100 x 30

**FAN SPEEDS** variable

HIGH-SPEED RPM

5,490 CFM

213

\*HIGH-SPEED CFM



**LOCATION RATING** 











flush up to 27° included sold separately



downrod

4.5" included





Reverse switch on remote

> LIGHTING LK8534\*\*, LK8560 & LK8561\*\* (sold separately)



16W LED with CCT Select LK8534\*\*-opal frosted shade LK8560—clear glass LK8561\*\*-opal frosted glass

LIGHTING LK8534\*\*

(sold separately)

16W integrated LED with CCT Select

lumens: 1,500

CRI: 90

LIGHTING LK8560 & LK8561\*\* (sold separately)

16W integrated LED with CCT Select

lumens: 1,600 

CRI: 90



**AVERAGE SPEED** 

**ENERGY GUIDE** 

**TOTAL AIR VOLUME** 

3.729 CFM

**ENERGY** USE

17 Watts

**ESTIMATED YEARLY ENERGY COST** 


\$5

AIRFLOW **EFFICIENCY** 

216 CFM/Watts

**CERTIFICATION** 



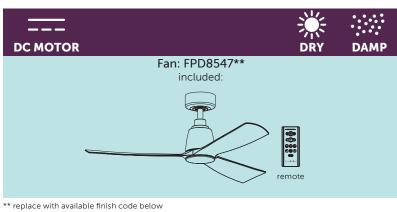

(sold separately)



Classic **Light Kit** LK8534\*\*







Knurled Light Kit LK8561\*\*





Close-To-Ceiling Kit CCK8534\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Wall Remote TW306

#### ordering example



CCK8534BS (brushed satin brass Kute™ close-to-ceiling kit)



#### FPD8547\*\* motor & blade finish combinations





+ matte white



matte greige + weathered wood



black + black



brushed satin brass + black



matte white + matte white




brushed nickel + brushed nickel



dark bronze + dark walnut



### KUTE™ 52

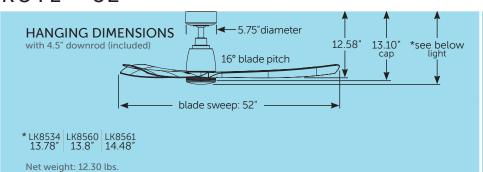



**MOTOR TYPE & SIZE** DC 100 x 30

Reverse switch on

remote

171 \*HIGH-SPEED CFM 6,701 CFM

**FAN SPEEDS** 

variable

HIGH-SPEED RPM

**LOCATION RATING** 











**MOUNTING TYPE** 



sloped up to 27° included sold separately





LIGHTING LK8534\*\*, LK8560 & LK8561\*\* (sold separately)



16W LED with CCT Select LK8534\*\*-opal frosted shade LK8560—clear glass LK8561\*\*—opal frosted glass

LIGHTING LK8534\*\*

(sold separately)

16W integrated LED with CCT Select

lumens: 1,500

CRI: 90

LIGHTING LK8560 & LK8561\*\* (sold separately)


16W integrated LED with CCT Select


lumens: 1,600 

CRI: 90



**QR CODE FOR FULL IMAGE** 

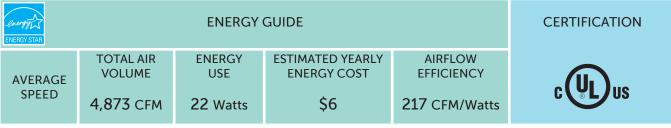

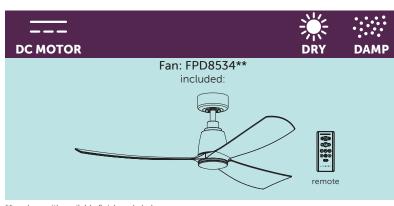

 $<sup>\</sup>ensuremath{^{\star\star}}$  replace with available finish code below

(sold separately)











Knurled Light Kit LK8561\*\*





Close-To-Ceiling Kit CCK8534\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



**2-wire Wall Remote** TW306

### ordering example



#### FPD8534\*\* motor & blade finish combinations




dark bronze + dark


walnut



brushed nickel + brushed

nickel

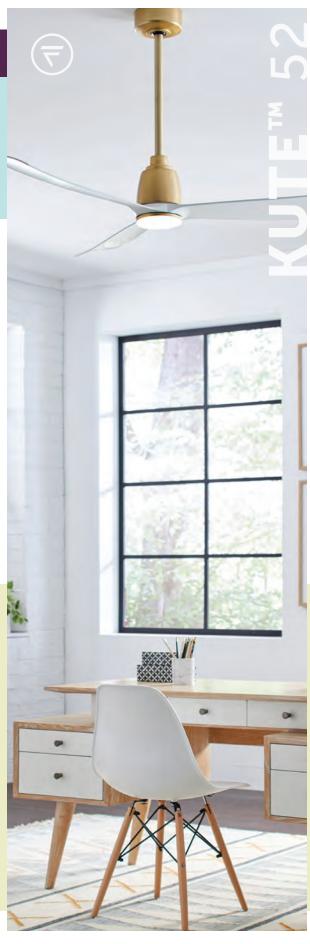

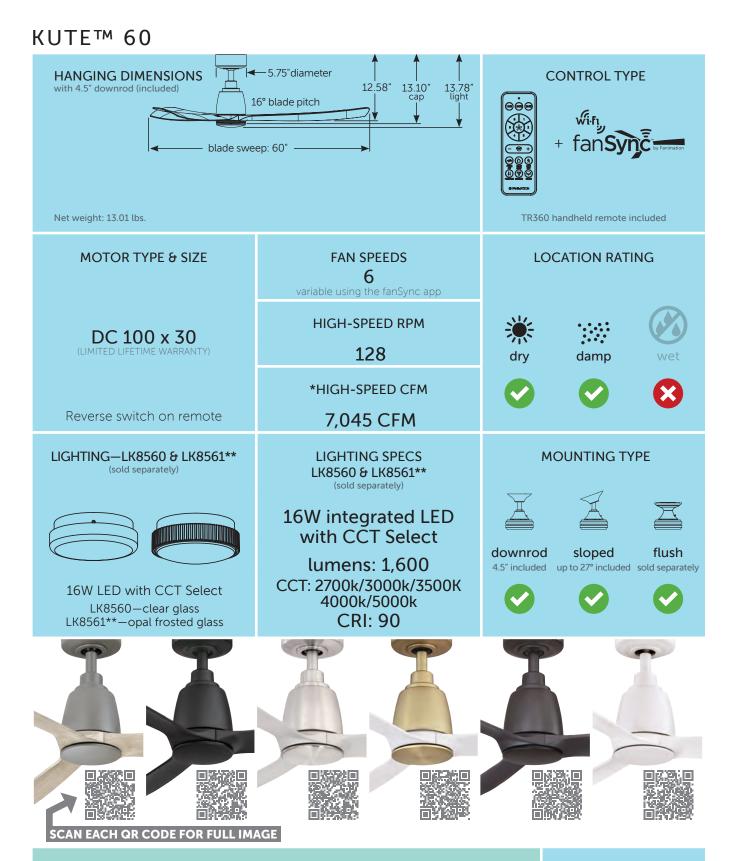

#### **ENERGY GUIDE**

AVERAGE SPEED TOTAL AIR VOLUME

4,968 CFM

ENERGY USE

23 Watts

ESTIMATED YEARLY ENERGY COST

\$6

AIRFLOW EFFICIENCY

214 CFM/Watts

#### CERTIFICATION





 $\ensuremath{^{\star\star}}$  replace with available finish code below

#### optional accessories

(sold separately)





Double-Walled Light Kit LK8560\*\*



Knurled Light Kit LK8561\*\*





Close-To-Ceiling Kit CCK8534\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Wall Remote TW406

#### ordering example



#### FPD8560\*\* motor & blade finish combinations





nickel



antique graphite + light oak | brushed nickel + brushed | dark bronze + dark walnut



black + black



matte white





matte white + matte white

view larger swatches on page 79



## KUTE5™ 52

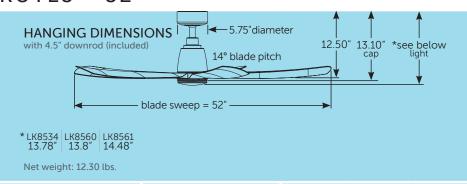



DC 100 x 30

**MOTOR TYPE & SIZE** 

**FAN SPEEDS** variable

HIGH-SPEED RPM

158

\*HIGH-SPEED CFM

6,719 CFM



**LOCATION RATING** 







**MOUNTING TYPE** 






flush up to 27° included sold separately





Reverse switch on remote

LIGHTING LK8534\*\*, LK8560 & LK8561\*\*



(sold separately)

16W LED with CCT Select LK8534\*\*-opal frosted shade LK8560—clear glass LK8561\*\*-opal frosted glass

LIGHTING LK8534\*\*

(sold separately)

16W integrated LED with CCT Select

lumens: 1,500 

CRI: 90

LIGHTING LK8560 & LK8561\*\* (sold separately)

16W integrated LED with CCT Select

lumens: 1,600

CRI: 90



#### **ENERGY GUIDE**

**AVERAGE SPEED** 

**TOTAL AIR VOLUME** 

4,257 CFM

**ENERGY** USE

23 Watts

**ESTIMATED YEARLY ENERGY COST** 


\$6

AIRFLOW **EFFICIENCY** 

184 CFM/Watts

**CERTIFICATION** 



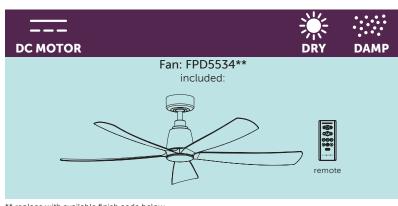

 $\ensuremath{^{\star\star}}$  replace with available finish code below

(sold separately)



Classic Light Kit LK8534\*\*







Knurled Light Kit LK8561\*\*





Close-To-Ceiling Kit CCK8534\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Wall Remote TW306

# ordering example



#### FPD5534\*\* motor & blade finish combinations





GR matte greige + weathered wood



black + black



brushed satin brass + black



matte white + matte white




nickel









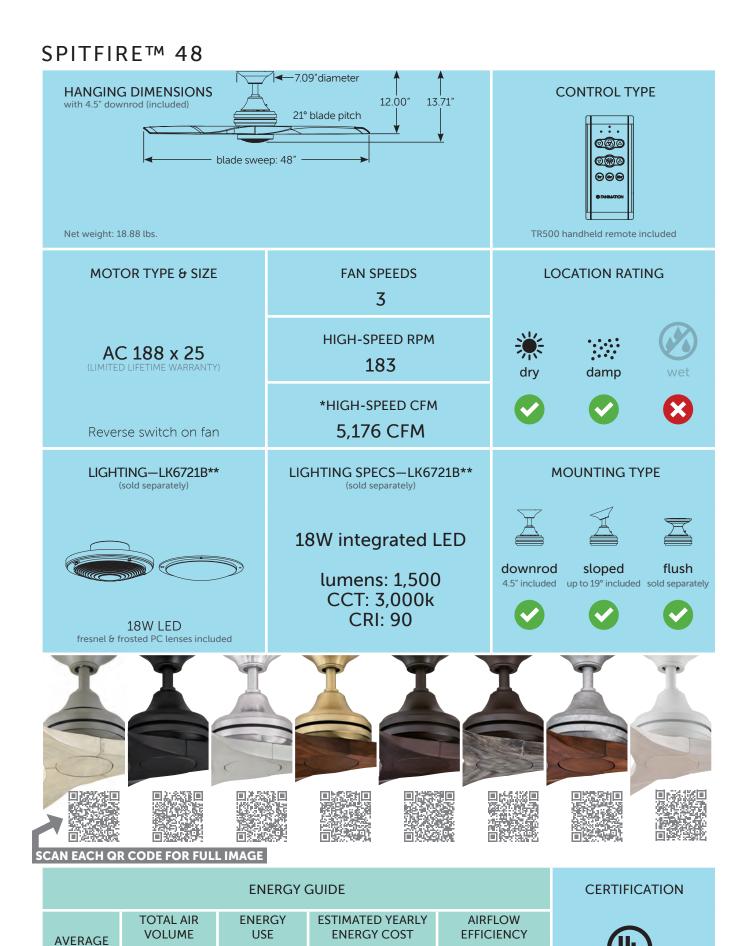

\$11

FANIMATION.COM


3,435 CFM

41 Watts

**SPEED** 

84 CFM/Watts

# MIX & MATCH FAN MOTOR, BLADES & LIGHT KIT SOLD SEPARATELY

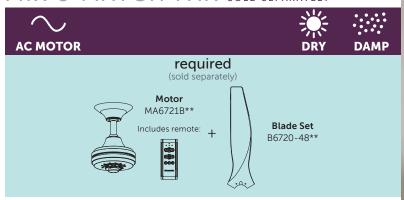

\*\* replace with available finish codes below

#### optional accessories

(sold separately)







Sloped Ceiling Kit (up to 42°) SCK1-52

Longer Downrods page 77

controls



2-wire Fan-only Wall Control WC1WH



3-wire Fan + Light Wall Control WC2WH



2-wire Fan-only Wall Remote WR500WH



2-wire Fan + Light Wall Remote WR501WH




WiFi Smart Receiver WFR50

# ordering example

MA6721BBS (brushed satin brass motor) B6720-48K (koa blade set) LK6721BBS (brushed satin brass light kit)



#### motor, light kit & close-to-ceiling kit finishes




#### blade finishes






# SPITFIRE™ 60

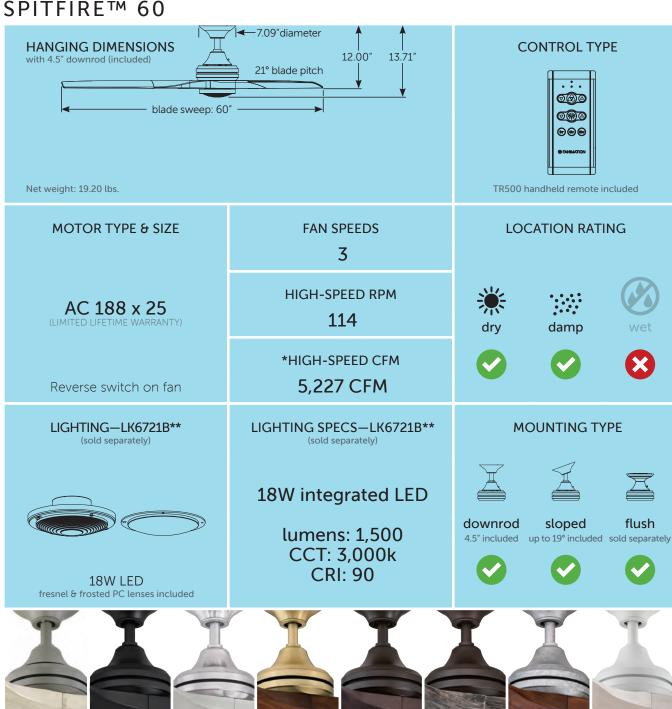




#### **ENERGY GUIDE CERTIFICATION TOTAL AIR ENERGY ESTIMATED YEARLY AIRFLOW** USE **VOLUME ENERGY COST EFFICIENCY AVERAGE SPEED** 3,776 CFM 41 Watts \$12 92 CFM/Watts






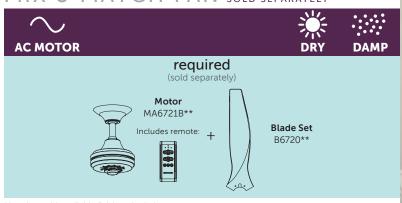

<sup>\*\*</sup> replace with available finish codes below

### optional accessories

(sold separately)

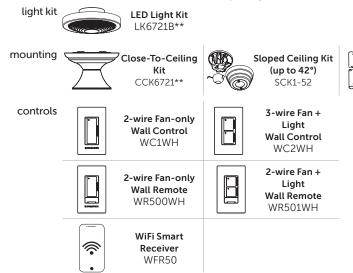



B6720K





#### blade finishes

Longer

Downrods

page 77










# SPITFIRE™ DC 64

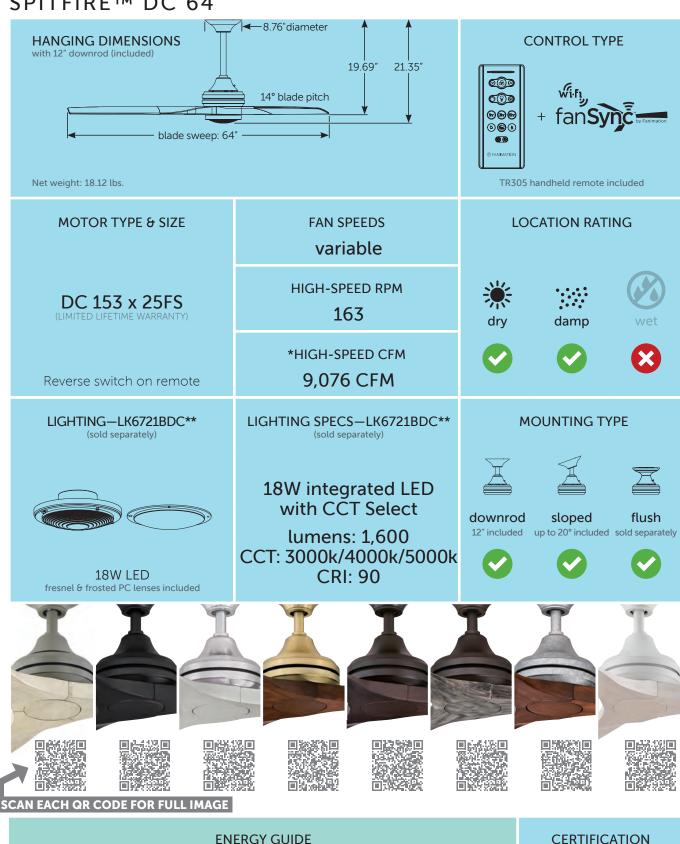

	ENERGY	GUID

**AVERAGE SPEED** 

TOTAL AIR VOLUME

5,858 CFM

**ENERGY USE** 


19 Watts

**ESTIMATED YEARLY ENERGY COST** 

\$5

**AIRFLOW EFFICIENCY** 311 CFM/Watts **CERTIFICATION** 



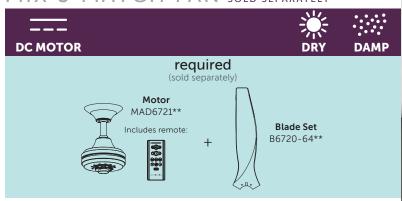

\*\* replace with available finish codes below

#### optional accessories

(sold separately)



mounting





Sloped Ceiling Ball (up to 42°) SCB1-52



controls



MAD6721BN

B6720-64K (koa blade set) LK6721BDCBN (brushed nickel light kit)

2-wire Fan-only Wall Control TW306

# ordering example (brushed nickel motor)




matte greige

#### blade finishes



# SPITFIRE™ DC 72

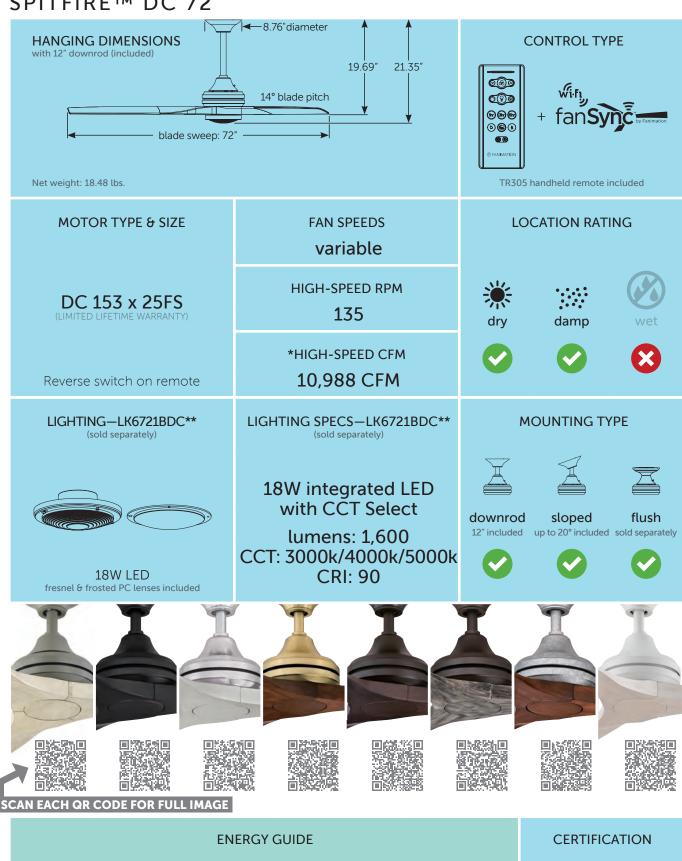

**ESTIMATED YEARLY** 

**ENERGY COST** 

\$6

**AVERAGE SPEED** 

TOTAL AIR

**VOLUME** 

7,007 CFM

**ENERGY** 


**USE** 

21 Watts

**AIRFLOW** 

**EFFICIENCY** 

336 CFM/Watts

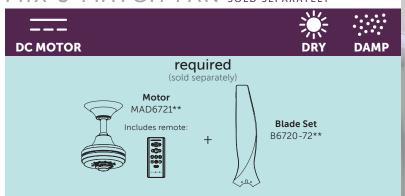

\*\* replace with available finish codes below

#### optional accessories

(sold separately)



Close-To-Ceiling mounting Kit CCK6721\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306

# ordering example MAD6721MW (matte white motor) B6720-72K (koa blade set) LK6721BDCMW (matte white light kit)









antique graphite brushed satin brass

motor, light kit & close-to-ceiling kit finishes

galvanized

BN

brushed nickel

LO



white washed

BL black











dark walnut












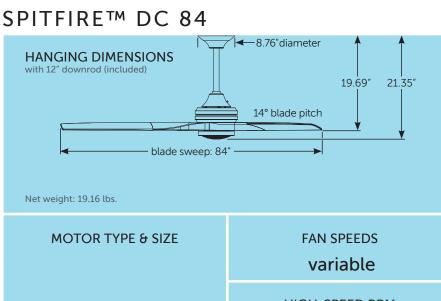



DC 153 x 25FS

HIGH-SPEED RPM 112

damp

LOCATION RATING

Reverse switch on remote

\*HIGH-SPEED CFM 12,900 CFM





LIGHTING-LK6721BDC\*\* (sold separately)



**18W LED** fresnel & frosted PC lenses included LIGHTING SPECS-LK6721BDC\*\* (sold separately)

18W integrated LED with CCT Select

lumens: 1,600 CCT: 3000k/4000k/5000k CRI: 90

MOUNTING TYPE







downrod

sloped











SCAN EACH QR CODE FOR FULL IMAGE

# **ENERGY GUIDE**

**AVERAGE SPEED** 

TOTAL AIR VOLUME

7.429 CFM

**ENERGY** USE


20 Watts

**ESTIMATED YEARLY ENERGY COST** 

\$6

**AIRFLOW EFFICIENCY** 376 CFM/Watts **CERTIFICATION** 



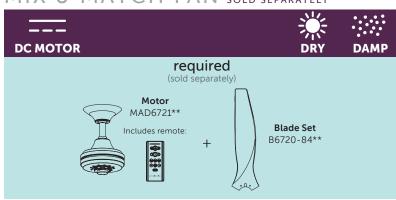

\*\* replace with available finish codes below

#### optional accessories

(sold separately)



Close-To-Ceiling mounting Kit CCK6721\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls




2-wire Fan-only Wall Control TW306

## ordering example



#### motor, light kit & close-to-ceiling kit finishes



matte greige


#### blade finishes





brushed nickel

## SPITFIRE™ DC 96

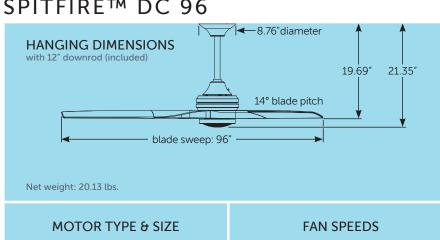



variable

LOCATION RATING

DC 153 x 25FS

HIGH-SPEED RPM 83





\*HIGH-SPEED CFM 12,410 CFM





Reverse switch on remote

LIGHTING-LK6721BDC\*\* (sold separately)

LIGHTING SPECS-LK6721BDC\*\* (sold separately)







fresnel & frosted PC lenses included

**18W LED** 

18W integrated LED with CCT Select

lumens: 1,600 CCT: 3000k/4000k/5000k

CRI: 90

## MOUNTING TYPE







downrod

sloped

flush 12" included up to 20° included sold separately



































SCAN EACH QR CODE FOR FULL IMAGE

**ENERGY GUIDE** 

**AVERAGE SPEED** 

TOTAL AIR VOLUME

8,515 CFM

**ENERGY** USE


24 Watts

**ESTIMATED YEARLY ENERGY COST** 

\$7

**AIRFLOW EFFICIENCY** 361 CFM/Watts **CERTIFICATION** 



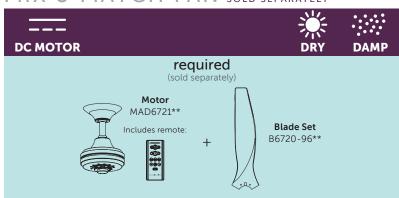

 $\ensuremath{^{\star\star}}$  replace with available finish codes below

#### optional accessories

(sold separately)



Close-To-Ceiling mounting Kit CCK6721\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306

# ordering example MAD6721BS (brushed satin brass motor) B6720-96K (koa blade set)

#### motor, light kit & close-to-ceiling kit finishes




#### blade finishes







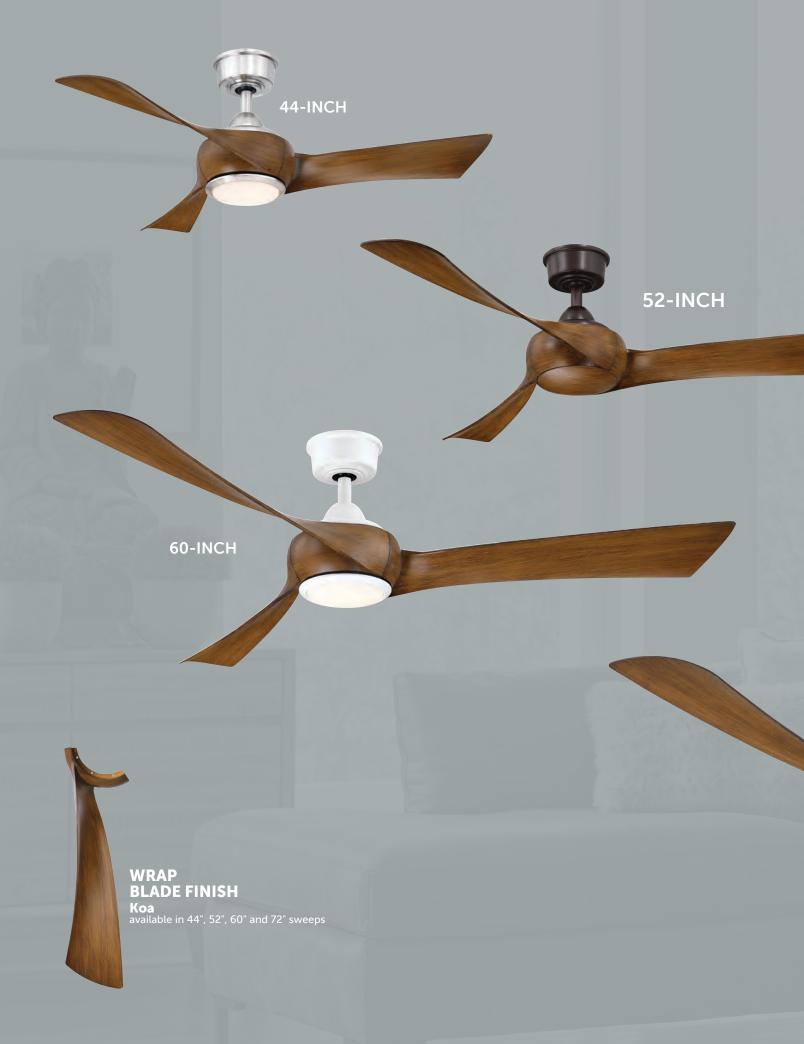



# WRAP™ CUSTOM 44



**ENERGY COST** 

\$6

FANIMATION.COM

AVERAGE SPEED **VOLUME** 

3,530 CFM

USE

20 Watts

\*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

**EFFICIENCY** 

178 CFM/Watts



 $\ensuremath{^{\star\star}}$  replace with available finish codes below

### optional accessories

(sold separately)



Close-To-Ceiling
Kit
CCK8002\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306

## ordering example



#### motor & light kit finishes



#### blade finishes





# WRAP™ CUSTOM 52



\$6

FANIMATION.COM

4,411 CFM

21 Watts

**SPEED** 

\*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

214 CFM/Watts



<sup>\*\*</sup> replace with available finish codes below

#### optional accessories

(sold separately)



mounting Close-To-Ceiling Kit CCK8002\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306

## ordering example



#### motor & light kit finishes



#### blade finishes





# WRAP™ CUSTOM 60



**ENERGY COST** 

\$7



AVERAGE SPEED **VOLUME** 

5,114 CFM

**USE** 

24 Watts

\*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

**EFFICIENCY** 

211 CFM/Watts



\*\* replace with available finish codes below

#### optional accessories

(sold separately)



mounting Close-To-Ceiling Kit CCK8002\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306



# ordering example

(brushed satin brass light kit)

# blade finishes







NEW







koa



#### motor & light kit finishes





# WRAP™ CUSTOM 72



\$6




7,685 CFM

21 Watts

**AVERAGE SPEED** 

> \*Airflow testing is conducted in accordance with the US Department of Energy's testing standards and under specific controlled environmental conditions. Actual airflow performance may vary based on the installation location and environmental factors.

372 CFM/Watts

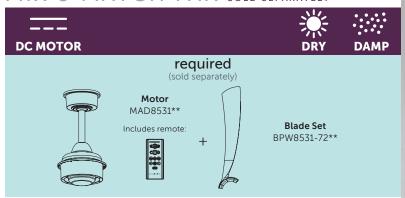

 $\ensuremath{^{\star\star}}$  replace with available finish codes below

#### optional accessories

(sold separately)



mounting Close-To-Ceiling
Kit
CCK8002\*\*



Sloped Ceiling Ball (up to 42°) SCB1-52



controls



2-wire Fan-only Wall Control TW306

#### blade finishes























NEW BLADE FINISHES BPW8514-\_\_\*\*
BPW8515-\_\_\*\*

Blade finishes: BNW,KW, NW Sweeps: 44", 52", 60", and 72" Material: Composite



NEW PLEATED BLADES BPW8565\*\*

Blade finishes: KW, MWW, NW Sweep: 52" Material: Composite



NEW BRUSHED NICKEL MOTOR FINISH, NEW NATURAL BLADE FINISH & NEW 12" LIGHT KIT



NEW TRIAIRE 12" LIGHT KIT LK8505\*\*\*


Available finishes: BLW, BN, BS, DZW, MWW



**NEW** TRIAIRE STANDARD LIGHT KIT FINISHES brushed nickel & brushed satin brass **LK8514BN & LK8514BS** 



# TRIARE™ CUSTOM 44—WET LOCATION & MARINE GRADE

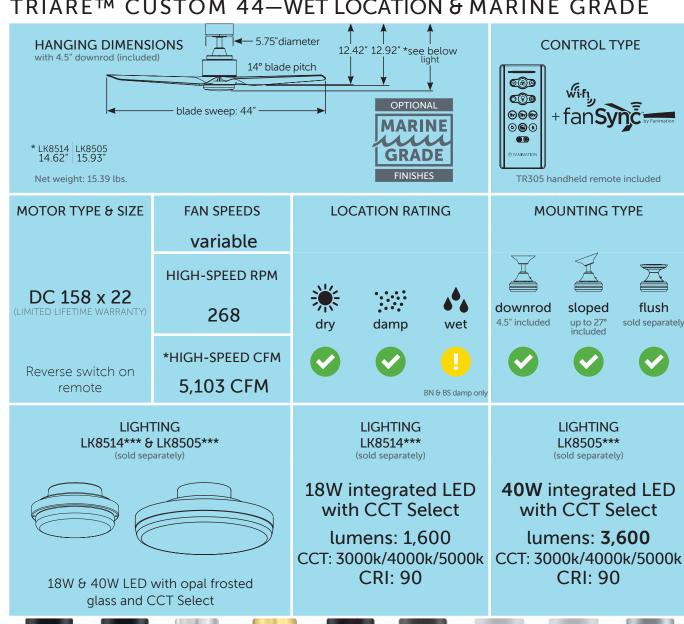



ENERGY GUIDE			CERTIFICATION		
AVERAGE SPEED	TOTAL AIR VOLUME  2,975 CFM	ENERGY USE 12 Watts	ESTIMATED YEARLY ENERGY COST \$3	AIRFLOW EFFICIENCY 256	c UL us



\*\* replace with available finish codes below

## optional accessories

(sold separately)

light kit

Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)

mounting



Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW306

## ordering example



LK8514BN (brushed nickel light kit)






#### blade finishes





# TRIARE™ CUSTOM 48

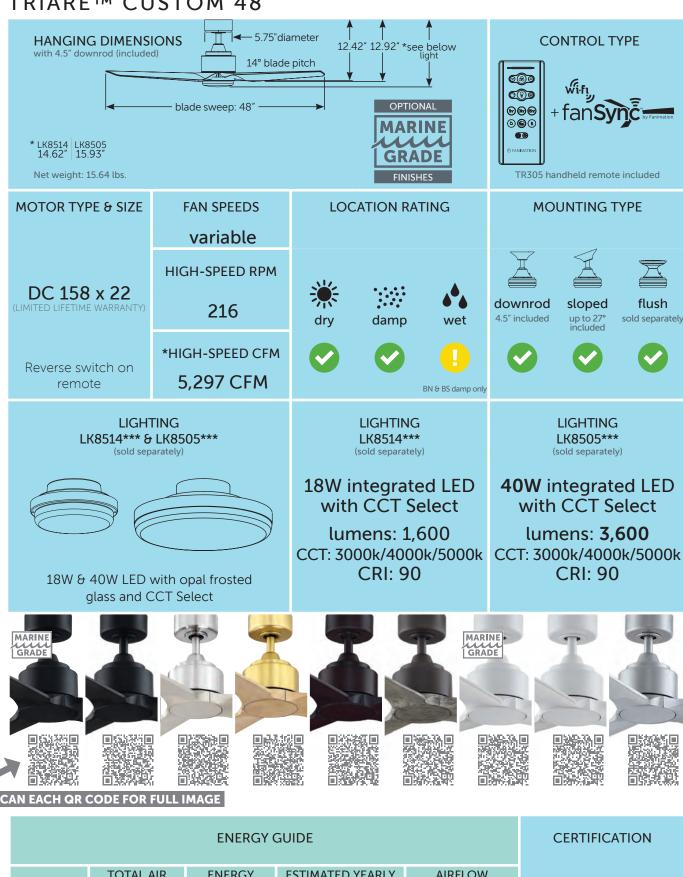

ENERGY GUIDE				CERTIFICATION	
AVERAGE SPEED	TOTAL AIR VOLUME  3,412 CFM	ENERGY USE 13 Watts	ESTIMATED YEARLY ENERGY COST \$4	AIRFLOW EFFICIENCY 259	c UL us



\*\* replace with available finish codes below

### optional accessories

(sold separately)

light kit



Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)

mounting



Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW306

### ordering example

MAD8514DZW (dark bronze motor) BPW8514-48DZW (dark bronze blade set)

LK8514DZW (dark bronze light kit)




silver

#### motor & light kit finishes



#### blade finishes







**DWAW** 


dark walnut



MWW matte white

weathered wood

# TRIARE™ CUSTOM 52

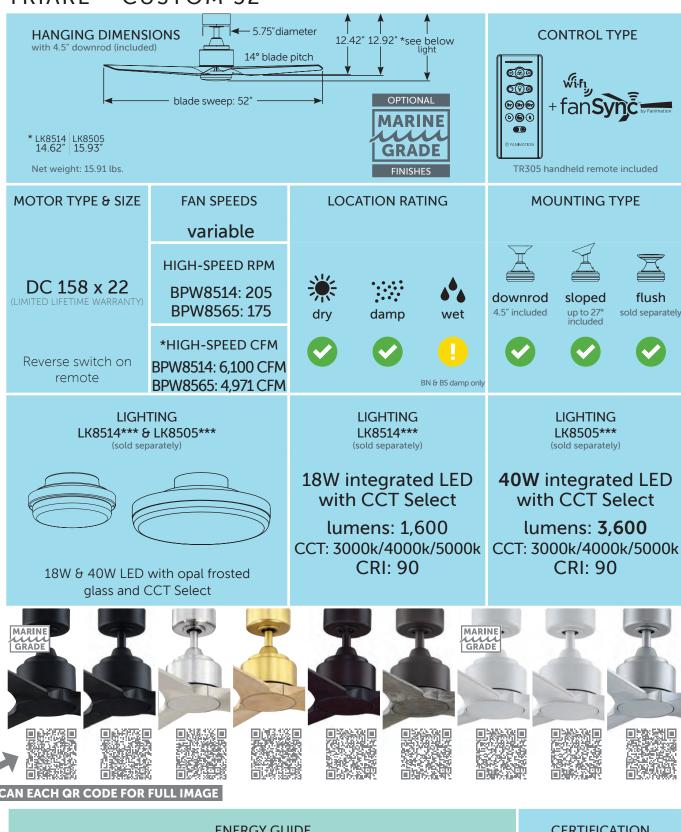

ENERGY GUIDE USING BPW8514**W BLADE SET				CERTIFICATION	
AVERAGE SPEED	TOTAL AIR VOLUME  3,696 CFM	ENERGY USE 12 Watts	ESTIMATED YEARLY ENERGY COST \$3	AIRFLOW EFFICIENCY 299	c UL us

# MIX & MATCH FAN MOTOR, BLADES & LIGHT KIT SOLD SEPARATELY **DC MOTOR** WET required (sold separately) Motor MAD8514\*\* (DAMP) MAD8514\*\*M (MG) MAD8514\*\*W (WET) OR Includes remote:



## optional accessories

**Blade Set** 

BPW8514-52\*\*W

light kit

Standard LED Light Kit

LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)



CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



**Blade Set** BPW8565\*\*

patent pending

Longer **Downrods** page 77

controls



2-wire Fan-only Wall Control TW306

#### ordering example

MAD8514BS (brushed satin brass motor) BPW8565KW (koa pleated blade set) LK8505BS (brushed satin brass 12-in light kit)



NEW

blade finishes



MWW



pleated blade finishes NEW KOA

koa

MWW

NEW



motor & light kit finishes

BLM

black (marine grade)

brass (damp)



BLW

black

dark bronze



BN

matte greige



dark walnut

BLW

black

NEW

matte white

NEW NW

WEW matte white

weathered wood



MWM matte white

(marine grade)










# TRIARE™ CUSTOM 56

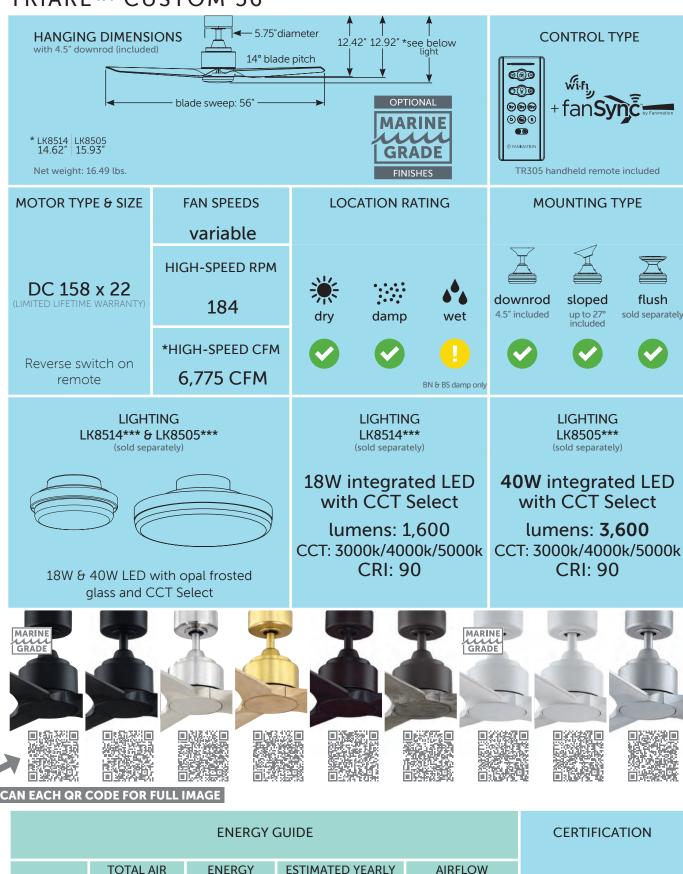

**ENERGY COST** 

\$4

AVERAGE SPEED VOLUME

4,252 CFM

USF

14 Watts

**EFFICIENCY** 

294



\*\* replace with available finish codes below

#### optional accessories

(sold separately)

light kit

Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)

mounting



Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW306

## ordering example

MAD8514DZW (dark bronze motor) BPW8514-56DZW (dark bronze blade set)

LK8505DZW (dark bronze 12" light kit)













SLW

silver




dark walnut










ETM CUSTOM 56

# TRIARE™ CUSTOM 60

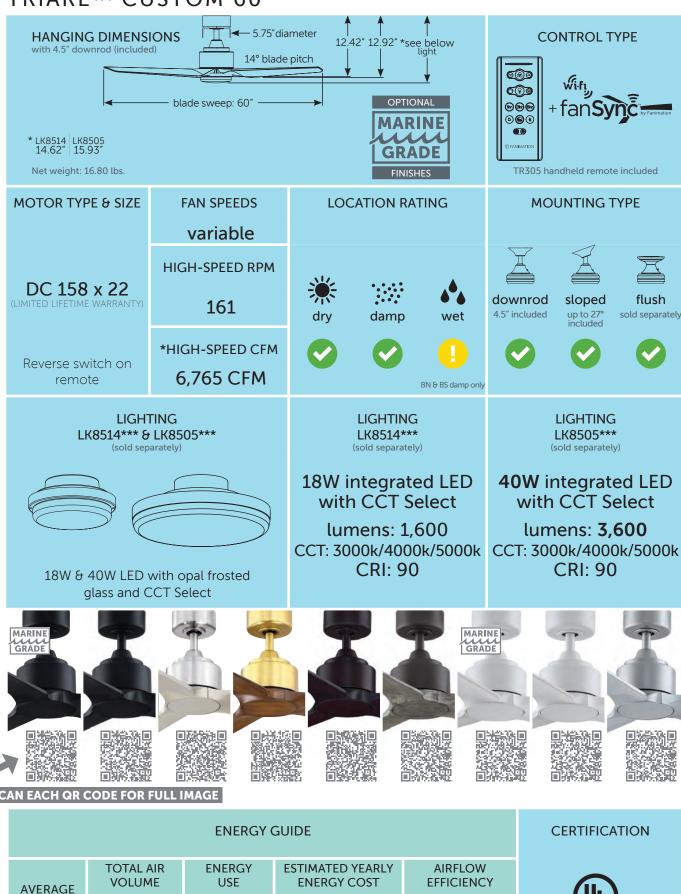


\$6

4,860 CFM

20 Watts

**SPEED** 

247

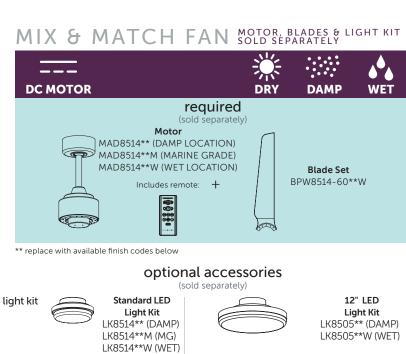

Sloped Ceiling Ball

(up to 42°)

SCB1-52

Longer

Downrods

page 77





Close-To-Ceiling

Kit

CCK8002\*\*

(not marine grade)

2-wire Fan-only Wall Control TW306

mounting


controls





(black 12-in light kit)

# TRIARE™ CUSTOM 64

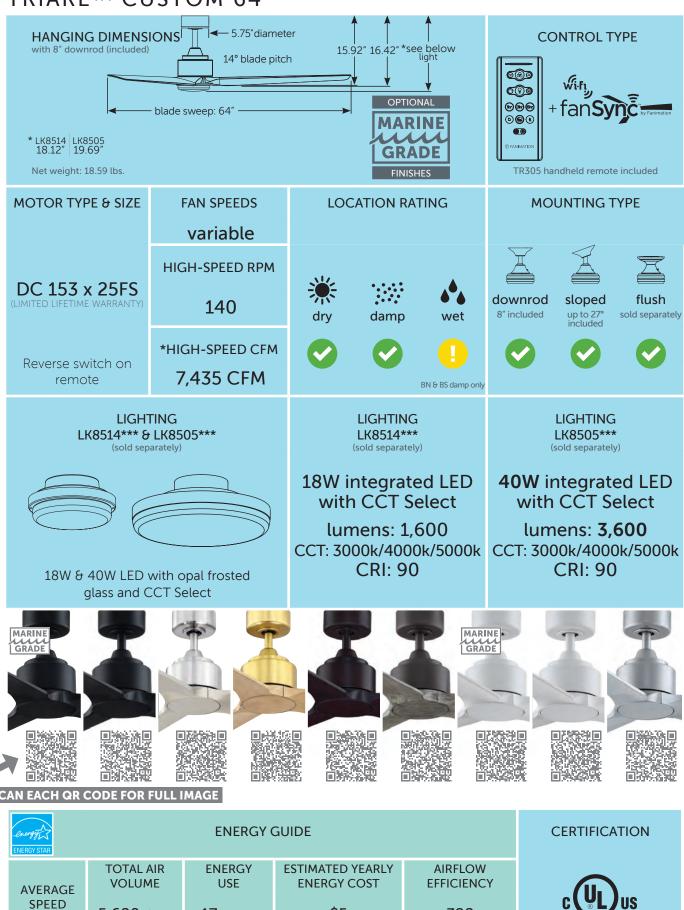

\$5

5,680 CFM

17 Watts

328



\*\* replace with available finish codes below

### optional accessories

(sold separately)



Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)





Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW306

## ordering example





#### motor & light kit finishes



#### blade finishes










WEW weathered wood



ET CUSTOM 64

# TRIARE™ CUSTOM 72

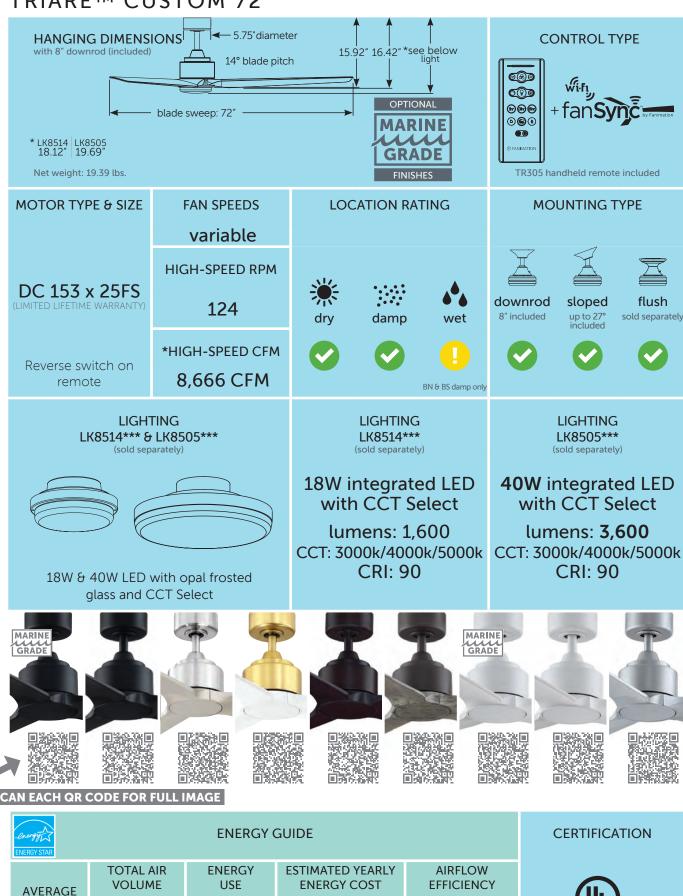

\$6

6,722 CFM

20 Watts

**SPEED** 

328

# MIX & MATCH FAN MOTOR, BLADES & LIGHT KIT SOLD SEPARATELY



\*\* replace with available finish codes below

# optional accessories

(sold separately)

light kit



Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)

mounting



Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



2-wire Fan-only Wall Control TW306

# ordering example

MAD8514BS (brushed satin brass motor)

BPW8514-72MWW (matte white blade set)

LK8505BS (brushed satin brass 12-in light kit)



silver

# motor & light kit finishes




# blade finishes





# TRIARE™ CUSTOM 84

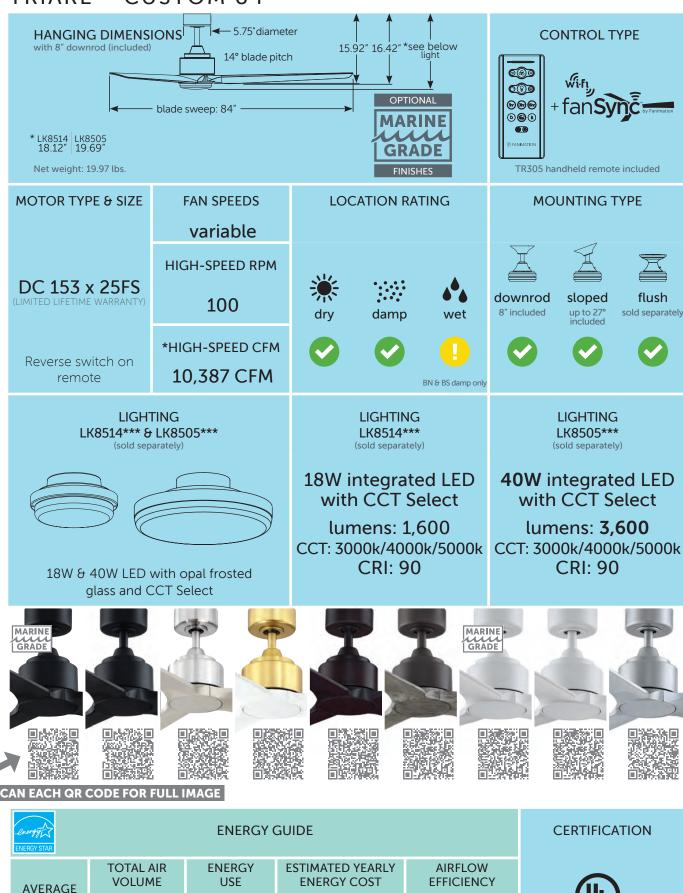

\$6

7,827 CFM

21 Watts

**SPEED** 

378





\*\* replace with available finish codes below

# optional accessories

(sold separately)

light kit

Standard LED Light Kit LK8514\*\* (DAMP) LK8514\*\*M (MG) LK8514\*\*W (WET)



12" LED Light Kit LK8505\*\* (DAMP) LK8505\*\*W (WET)

mounting



Close-To-Ceiling Kit CCK8002\*\* (not marine grade)



Sloped Ceiling Ball (up to 42°) SCB1-52



Longer Downrods page 77

controls



(black motor)

LK8505BS

2-wire Fan-only Wall Control TW306



# blade finishes





BLM

brass (damp)

MWM



DZW

dark bronze













# CONTROLS

NEW



**NEW** 

## TR360

- HAND-HELD DC **REMOTE**
- •6-SPEED FAN CONTROL
- •LIGHT CONTROL WITH DIMMER AND 5 CCT **SELECT**
- REVERSING
- FRESH AIR
- HOME AWAY
- •SAFE EXIT
- LEARN PAIRING (NO DIP SWITCHES)
- COMES ALREADY PAIRED WITH FAN

# **INCLUDED WITH:**

**AVIARA** ISLANDER DC KUTE 60

TW406 COMPANION WALL CONTROL AVAILABLE (SEE FACING PAGE)



FANIMATION

## TR361

- HAND-HELD DC REMOTE
- •6-SPEED FAN CONTROL
- •UP- AND DOWN-LIGHT **CONTROL WITH** DIMMER AND 5 CCT **SELECT**
- REVERSING
- FRESH AIR
- HOME AWAY
- SAFE EXIT
- LEARN PAIRING (NO DIP SWITCHES)
- COMES ALREADY PAIRED WITH FAN

## INCLUDED WITH:

**TORCHAIRE 52** TORCHAIRE 64

TW407 COMPANION WALL CONTROL AVAILABLE (SEE FACING PAGE)



# **CONTROL YOUR CEILING FAN WITH YOUR** SMART DEVICES & PERSONAL VOICE ASSISTANTS!



- fanSync WiFi® receiver
- AC fan—3 fan speeds
- Fan and downlight control
- Timer, safe exit and favorites list via smart device
- - fanSync WiFi® receiver
  - DC fan-variable fan speeds
  - Fan and downlight control
  - Included with DC ceiling fans

- Wire and install the fanSync WiFi receiver into your ceiling fan's hanger bracket/canopy.
- Download the fanSync Wifi app in the Google Play or App Store and follow the simple setup instructions.

## INTEGRATES WITH:











Devices other than Amazon Echo and Google Home connect via the IFTTT app.

# **CONTROLS**



## **UL LISTED**

O Optional Do not store or mount remote controls outdoors

WH-White



# WFR50 • WiFi®

connectivity
Fan and
downlight
Receiver unit



and light remote

Receiver unit
and hand-held

transmitter • 5 dipswitches for



Non-reversing fan and light remote
 Learn-mode canopy receiver unit for easy set up and 65,000 code settings included
 3 fan speeds
 125 processes for the control of the co

3 fan speeds
1.25 amps max. fan load
Infinite light levels up to 190 watts
Dimmer on off switch for use with



# CWRL4WH & CWRL4LA Non-reversing for Non-reversing fan and light control 2-wire installation 3 fan speeds

1.0 amps max. fan load
Learn-mode canopy receiver



CW5WH & CW5LA

• Fan-only two fan slide control

• 2-wire installation

• 3 fan speeds

• 5 amps max. fan load



CW7WH
• Fan-only five fan slide control

•	3 fan speeds
•	5 amps max. fan
	load

LA—Light Almond		3 fan speeds     Downlight control	Dimmer on/off switch for use with CFL bulbs (dimmer must be turned off)     May be used with CWRL4**	unit with 65,000 code settings included Infinite light levels up to 190 watts May be used with CRL4WH		
Barlow™	0		0	0		
Paget™	0		0	0		
Spitfire™AC—All	0		0	0	0	0
Starboard™ L	0	0	0	0		
Starboard™NL	0	0	0	0	0	0



**UL LISTED** 

O Optional

WH-White Barlow™

Paget™

Do not store or mount remote controls outdoors

Spitfire<sup>™</sup> AC-All

Starboard™ I

Starboard™ NL



WC1WH Fan only control
 Control on/off rocker

0

0

switch 3 fan speeds 2-wire hardwire installation



WC2WH
• Fan and light control
• Control on/off rocker

0

0

0

0

switch 3 fan speeds

Dimming
 3-wire hardwire installation



# WR500WH

 Fan only control
 Control on/off rocker switch 3 fan speeds

Receiver included

• 5 dip switch • 2-wire installation

0

0



## WR501WH

O

0

0

0

 Fan and light control Control on/off rocker switch

• 3 fan speeds

 Receiver included 5 dip switch
 2-wire installation



WR505WH-NEW Fan control
 Control on/off rocker

switch

• 3 fan speeds Receiver included
 Pairing mode
 (no dip switches)

0

0

# Fan and light controlControl on/off rocker switch 3 fan speeds

· Pairing mode (no dip

WR506WH-NEW

switches)
0
0
0
0





- UL LISTED
- O Optional Do not store or mount



- TW306
- TW306

  DC reversible fan and light control with CCT Select

  Mounts over switch plate

  2-wire installation

  Variable fan speeds
- Downlight control For use with fans that include TR305 remote only



T	W406- <b>NEW</b>
•	DC reversible fan and light control with 5CCT Select
	Mounts over switch plate

- 2-wire installation
- 6 fan speeds
   For use with fans that include TR360 remote only

	10		ı
			1
	0		
			ı
	7	6	ı

# TW407-**NEW**

- DC reversible fan and down light and uplight control with 5CCT Select Mounts over switch plate
   2-wire installation

- 6 fan speeds For use with fans that include TR361 remote only

	Tor use with this tractifictate moos remote only		Tor use with taris triat include 111301 terriote only
Aviara™		0	
Islander™DC		0	
Kute™- 44" & 52"	0		
Kute™— 60"		0	
Kute5™	0		
Lenzi™	0		
Spitfire™ DC—All	0		
TorchAire™—All			0
TriAire™—All	0		
Wrap™—All	0		

# DOWNRODS & EXTENSION POLES

## **DOWNRODS**

# O

- Order according to length
- Use finish code to complete the part number larger swatches on page 79
- See bottom of page for suggested lengths

## **DOWNROD COUPLERS**



- Joins two downrods together for extended lengths
- When ordering, use finish code for steel downrods shown below to complete the part number.
  - DR1-CP\*\* 1" diameter downrod coupler

## **STEEL**

DR1-12**	12" downrod
DR1-18**	18" downrod
DR1-24**	24" downrod
DR1-36**	36" downrod
DR1-48**	48" downrod
DR1-60**	60" downrod
DR1-72**	72" downrod

















## TRUE STAINLESS STEEL

Wet location rated. Resistant to rust and corrosion.

DR1SS-12***	12" wet downrod
DR1SS-18***	18" wet downrod
DR1SS-24***	24" wet downrod
DR1SS-36***	36" wet downrod
DR1SS-48***	48" wet downrod
DR1SS-60***	60" wet downrod
DR1SS-72***	72" wet downrod



9 ft. ceiling



10 ft. ceiling



11 ft. ceiling



12 ft. ceiling





13 ft. ceiling




14 ft. ceiling



15 ft. ceiling


# **CHOOSING YOUR DOWNROD**

Recommended downrod length is based on ceiling height. Ideal distance from floor to fan blades is 7 to 9 feet.



Run





For lengths greater than 72 in., join two downrods with DR1-CP\*\* coupler

# CLOSE-TO- & SLOPED-CEILING KITS

WET RATED CCK8002BLW

CCK8002BNW

CCK8002BSW

CCK8002DZW

KUTE™/KUTE5™ ONLY

black wet

brushed nickel wet

dark bronze wet

brushed satin brass wet

## **CLOSE-TO-CEILING KIT**



- Replaces hanger bracket/downrod assembly to move your fan closer to the ceiling, creating more head room
- Intended for use with low ceilings.
- Please see individual fan pages for compatibility
- · Tall and short kits both included.
- Tall dimensions: 5.13" (H) x 8" (DIA.)
- Short dimensions: 2.67" (H) x 8" (DIA.)
- For 4.5" included downrod fans: Subtract 3.74" for short close to ceiling kit and 1.28" for tall close to ceiling kit
- For 6" included downrod fans: Subtract 5.24" for short close to ceiling kit and 2.78" for tall close to ceiling kit

## 4.5" downrod Tall close-to-ceiling kit Short close-to-ceiling kit 12.62 11.34" 8.88" NN 8 8 8 8 8 8 8

CCK8002GRW matte greige wet

CCK8002MWW matte white wet


CCK8002SLW silver wet

## **STANDARD**

CCK8002AGP	antique graphite	CCK8002DZ	dark bronze
CCK8002BL	black	CCK8002GZ	galvanized
CCK8002BN	brushed nickel	CCK8002MW	matte white

# SPITFIRE™ ONLY

CCK6721AGF	antique graphite	CCK6721DZ	dark bronze	CCK8534AGP	antique graphite	CCK8534DZ	dark bronze
CCK6721BL	black	CCK6721GR	matte greige	CCK8534BL	black	CCK8534GR	matte greige
CCK6721BN	brushed nickel	CCK6721GZ	galvanized	CCK8534BN	brushed nickel	CCK8534MW	matte white
CCK6721BS	brushed satin brass	CCK6721MW	matte white	CCK8534BS	brushed satin brass		



## SLOPED-CEILING BALL KIT



- Includes black hanger ball only
- See spec section of individual fan pages for compatibility with your fan.
- Hanger ball works with current Fanimation canopy and hanger bracket.

  • Allows for ceiling slope up to 42°.
- For use with any length downrod

SCB1-52 For use with 1" dia. downrods

## SLOPED-CEILING KIT



- Includes hanger bracket, hanger ball, ceiling canopy, canopy screw cover and mounting hardware
- See spec section of individual fan pages for compatibility with your fan.
- Allows for ceiling slope up to 42°
- For use with any length downrod

# **STANDARD**


SCK1-52BL	black
SCK1-52BN	brushed nickel
SCK1-52BS	brushed satin brass
SCK1-52CH	chrome
SCK1-52DZ	dark bronze
SCK1-52GR	matte greige
SCK1-52GZ	galvanized
SCK1-52MW	matte white
SCK1-52OB	oil-rubbed bronze
SCK1-52PN	polished nickel

# **WET RATED**

SCK1-52BLW	black wet
SCK1-52DZW	dark bronze wet
SCK1-52GRW	matte greige wet
SCK1-52MWW	matte white wet
SCK1-52SLW	silver wet

# MOTOR, DOWNROD & LIGHT KIT FINISH SWATCHES

DUE TO THE NATURE OF MATERIALS; FINISHES COLOR, TEXTURE AND SHADING MAY VARY

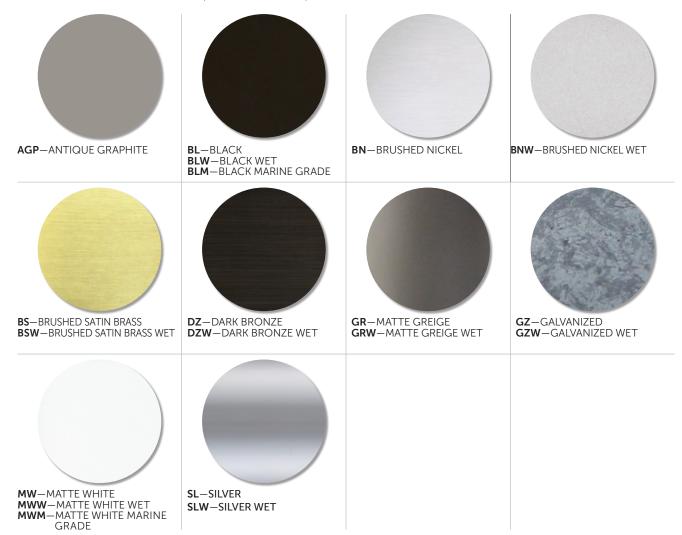

# **BLADE SWATCHES**

DUE TO THE NATURE OF MATERIALS; FINISHES COLOR, TEXTURE AND SHADING MAY VARY







VISIT OUR **2024 FULL CATALOG**TO VIEW THE REST OF OUR
CURRENT OFFERINGS!



FANIMATION.COM



10983 Bennett Parkway Zionsville, IN 46077

888 567 2055 (toll-free) 317 733 4113 317 733 4162 (fax)

FANIMATION.COM



