


AIRE DUO™

LP8066LBN

(Lowes Item #921297)

48" Ceiling Fan



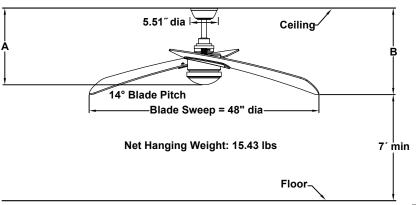

	Α	В
Fan w/ 6"downrod	15.83″	17.78″
Fan w/12" downrod	21.83″	23.78"
Fan w/18" downrod	27.83"	29.78"
Fan w/24" downrod	33.83"	35.78"
Fan w/36" downrod	45.83"	47.78″
Fan w/48" downrod	57.83"	59.78″
Fan w/60" downrod	69.83"	71.78″
Fan w/72" downrod	81.83″	83.78"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of two 32" plywood blades is included.

CONTROL OPTIONS:

TR800S hand-held remote control is included. Push button remote control with variable fan speeds, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection) and off button. Optional WT503WH, WC4WH wall controls and WFR55 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

Available Finishes			
LBN	Brushed Nickel with Black Blade and Opal Frosted Glass		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	176	4638	107	0.36	43
Med	126	3060	127	0.33	24
Low	76	1728	188	0.17	9

	Energy Guide FTC				
Power (W _{ave}) Total Air Delivery (CFM _{ave})		Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)		
28	3274	8	116		

Lighting Information (120V)					
Light Bulb Lumens Delivered Amount Lumens Color Temp		CRI	Shade/Glass type		
18W CCT LED	1600	593/633/620	Warm/Natural/Cool	90%	Opal Frosted

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 6" downrod (DRT1-6). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 225 sq ft.