


AIRE DROP™

LP8068LAZ (Lowes Item #921296) LP8068LBN (Lowes Item #921295) 52" Ceiling Fan

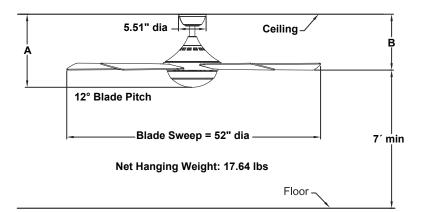

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 AC motor is designed for optimal performance with this fan.

BLADES:

A set of five 23" plywood blades is included.

CONTROL OPTIONS:

TR800S hand-held remote control is included. Push button remote control with variable fan speeds, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection) and off button. Optional WT503WH, WC4WH wall controls and WFR55 WiFi

receiver unit are available — sold separately.

Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt CCT LED (Warm/Natural/Cool) included.

Lighting Information (120V)					
Light Bulb	Lumens Amount		Color Temp	CRI	Shade/Glass type
18W CCT LED	1600	690/720/720	Warm/Natural/Cool	90%	Opal Frosted

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 12" downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only. This fan is for room up to 400 sq ft.

	Α	В
Fan w/4.5" downrod	14.70″	11.40″
Fan w/12" downrod	22.20″	18.90″
Fan w/18" downrod	28.20″	24.90″
Fan w/24" downrod	34.20″	30.90″
Fan w/36" downrod	46.20″	42.90″
Fan w/48" downrod	58.20″	54.90″
Fan w/60" downrod	70.20″	66.90″
Fan w/72" downrod	82.20″	78.90″

Available Finishes			
LAZ	Aged Bronze with Cherry/Dark Walnut Reversible Blade and Opal Frosted Glass		
LBN	Brushed Nickel with Gray/Dark Walnut Reversible Blade and Opal Frosted Glass		

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	171	5693	87	0.55	66
Med	123	3722	120	0.37	31
Low	66	1992	162	0.24	12

1						
		Energy Guide FTC				
	Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)		
	41	3868	12	94		